



JN0-682^{Q&As}

Data Center Professional (JNCIP-DC)

Pass Juniper JN0-682 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/jn0-682.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

Which EVPN router type prevents BUM traffic from looping back to a multihomed host?

- A. Ethernet segment router
- B. IP prefix route
- C. Ether auto discovery route
- D. Inclusive multicast-Ethernet tag route

Correct Answer: C

QUESTION 2

Which protocol replicates forwarding information between MC-LAG peers?

- A. VCCP
- B. ICCP
- C. VRRP
- D. LLDP

Correct Answer: B

QUESTION 3

You are troubleshooting an L3VPN that is part of an EVPN/MPLS DCI. You notice that the EVPN overlay BGP session toward 10.29.50.4 is unable to establish.

```
VPN.inet.0: 15 destinations, 16 routes (15 active,
0 holddown, 1 hidden)
 10.29.50.4/32 (2 entries, 1 announced)
   Import Accepted
   Route Distinguisher: 65000:12345
   VPN Label: 16
   Nexthop: 192.168.5.5
   MED: 3
   Localpref: 100
   AS path: I
   Communities: target:65000:12345 rte-
type:0.0.0.0:1:0
```




Why is the BGP session failing to establish?

- A. The route-distinguisher value on the local PE is incorrect
- B. There is no route for 192.168.5.5 an VPN net 0.
- C. There is no route for 192.168.5.5. in inet 3.
- D. The vrf-table label value is not configured in the remote PE.

Correct Answer: C

QUESTION 4

In the exhibit, VM1 is part of the same VXLAN segment as VM3.

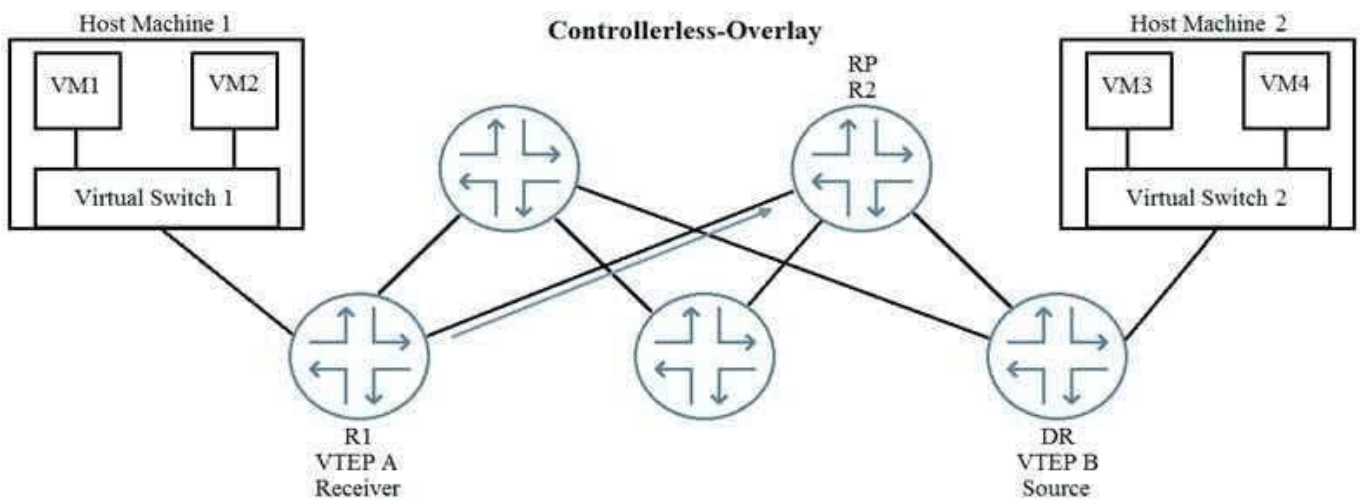


Which type of message will R1 initially send to R2 so that VM1 receives BUM traffic from VM3?

- A. PIM Join
- B. PIM Register message
- C. IGMP Join (S, G)
- D. IGMP Join (*.G)

Correct Answer: A

QUESTION 5

Devices spine1 and spine have been configured as distributed Layer 3 gateways in the VXLAN topology, and devices leaf1 and leaf3 have been configured as layer 2 gateways. Device host must be able to communicate with device host?

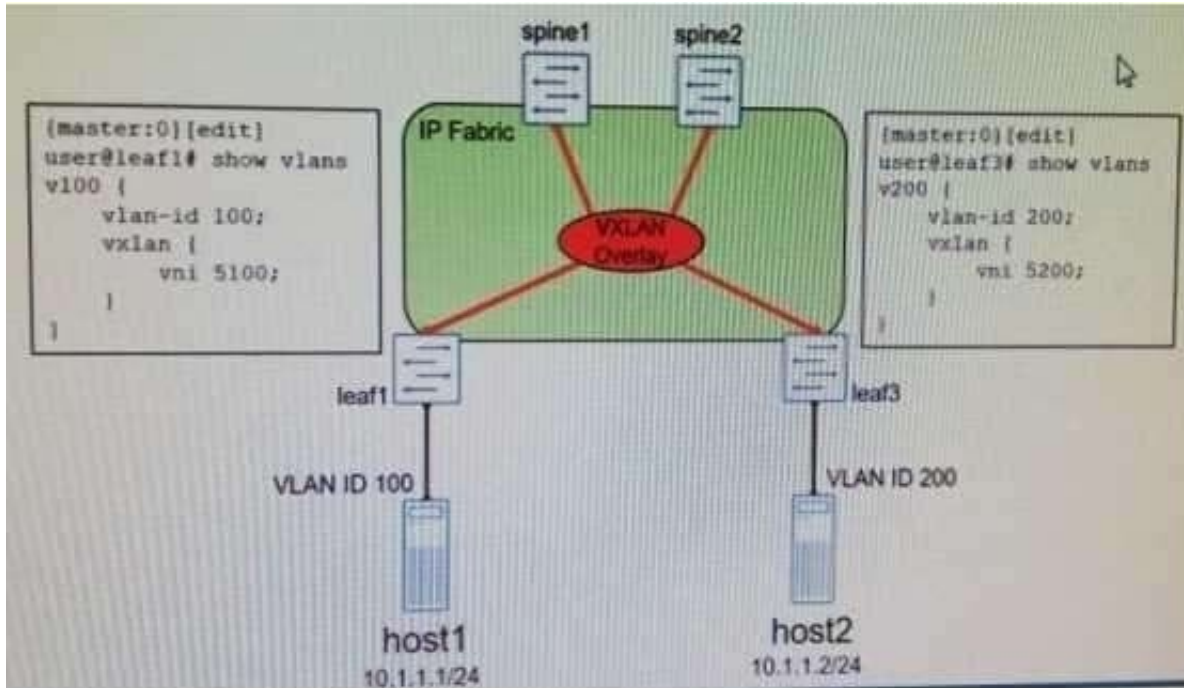

Which two statements are true? (Choose two.)

- A. An IRB interface must be configured on device leaf1 and leaf2.
- B. An IRB interface must be configured on devices spine1 and spine2.
- C. Traffic from host1 to host2 will transmit the VXLAN tunnel from leaf1 to leaf3.
- D. Traffic from host1 to host will transit a VXLAN tunnel to spine or spine2 then a VXLAN from spine1 or spine2 to leaf 3.

Correct Answer: BC

[Latest JN0-682 Dumps](#)

[JN0-682 PDF Dumps](#)

[JN0-682 Exam Questions](#)