



# JN0-740<sup>Q&As</sup>

ACX, Specialist (JNCIS-ACX)

## Pass Juniper JN0-740 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/jn0-740.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper  
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





### QUESTION 1

Which ScreenOS CLI command would be useful for troubleshooting a policy deny?

- A. get flow debug
- B. debug flow basic
- C. exec flow analysis
- D. debug session basic

Correct Answer: B

---

### QUESTION 2

You are looking at your policies via the Web UI and you notice that the green permit policy has turned blue. What would cause this?


- A. The policy is currently inactive
- B. The policy is configured to support a MIP
- C. That the policy is configured for unidirectional NAT
- D. The Policy has failed to pass permitted traffic due to a virus
- E. The policy is currently passing traffic beyond its traffic limits and it is currently in alarm

Correct Answer: C

---

### QUESTION 3

-- Exhibit --- Exhibit -Click the Exhibit button. In the exhibit, if you configure NAT-src on interface e0/4, and do not specify a DIP, which address will be

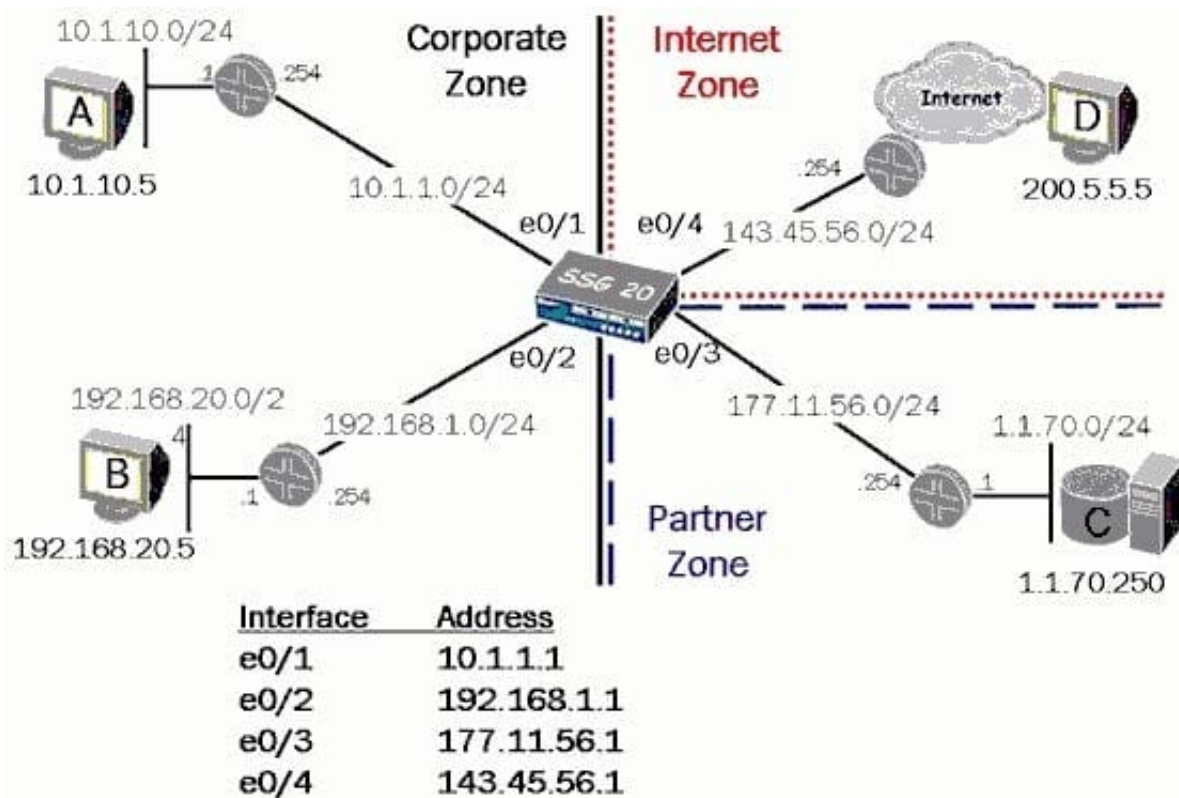

used as the outbound source address of packets destined for the Internet?

- A. 143.45.56.1
- B. 143.45.56.254
- C. NAT-src requires a DIP
- D. the original source address

Correct Answer: A

#### QUESTION 4

How is Antivirus Scanning enabled on a NetScreen device?

- A. Antivirus Scanning is implemented via policy.
- B. Antivirus scanning is implemented at the interface
- C. Antivirus scanning is a stand alone product and manually enabled.
- D. Antivirus scanning is turned on by zone- like Screening and Malicious URLs

Correct Answer: A

#### QUESTION 5



What must be configured to remotely manage a NetScreen device operating in transparent mode?

- A. An IP address must be configured for VLAN1
- B. The telnet management service must be enabled
- C. An IP address must be configured for the VLAN zone
- D. V1-Trust needs to have management services enabled
- E. The public SNMP community string must be configured

Correct Answer: A

[Latest JN0-740 Dumps](#)

[JN0-740 PDF Dumps](#)

[JN0-740 Practice Test](#)