



NS0-173^{Q&As}

Cisco and NetApp FlexPod Design Specialist

Pass NetApp NS0-173 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/ns0-173.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by NetApp
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers





QUESTION 1

You want to deploy a FlexPod Datacenter solution based on the minimum hardware requirements.

Which three components must be deployed in highly available pairs to accomplish this task? (Choose three.)

- A. Cisco USC Nexus Switches
- B. Cisco UCS 5108 Chassis
- C. NetApp FAS Storage Controllers
- D. Cisco APICs
- E. Cisco UCS Fabric Interconnects

Correct Answer: BCE

QUESTION 2

You are configuring high availability within the network layer of your FlexPod configuration.

In this scenario, what are two Cisco best practices for designing vPC on your Cisco 9000 Series switches? (Choose two.)


- A. Peer keep-alive connectivity between the switches should be established.
- B. A minimum of four 10GB Ethernet connections are required for vPC.
- C. The vPC auto-recovery feature should be enabled.
- D. Port channels should be configured for LACP passive mode.

Correct Answer: AB

vPC also relies on the periodic keepalive messages to determine when one of the connected devices on the peer link fails. vPC peer link ?The link used to synchronize states between the vPC peer devices. Both ends must be on 10-Gigabit Ethernet or 40-Gigabit Ethernet interfaces. Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/nexus9000/sw/6-x/interfaces/configuration/guide/b_Cisco_Nexus_9000_Series_NX-OS_Interfaces_Configuration_Guide/b_Cisco_Nexus_9000_Series_NX-OS_Interfaces_Configuration_Guide_chapter_0111.html

QUESTION 3

Click the Exhibit button.

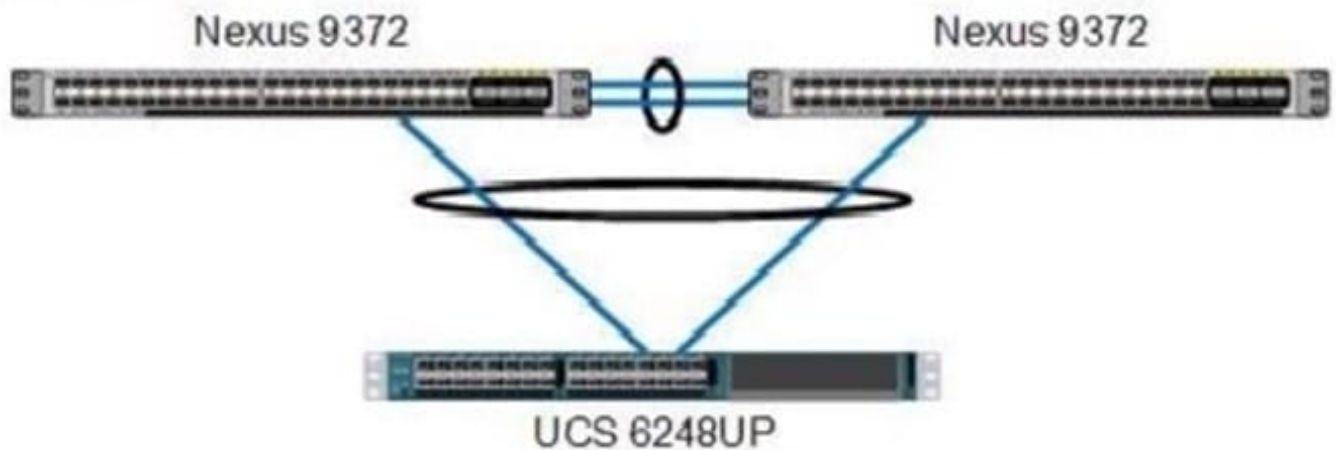

Referring to the exhibit, what is the name given to the link between the two Cisco Nexus switches?

- A. vPC Domain ID
- B. vPC peer domain
- C. vPC peer link
- D. vPC peer connection

Correct Answer: C

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/nexus5000/sw/layer2/503_n2_1/503_n2_1nw/Cisco_n5k_layer2_config_gd_rel_503_N2_1_chapter8.html

QUESTION 4

You are designing a FlexPod solution with a 2-node storage system, multiple compute chassis, and ACI.

In this scenario, which two network switches are required? (Choose two.)

- A. leaf switch
- B. core switch
- C. cluster interconnect switch
- D. spine switch

Correct Answer: AD

Reference: <https://www.cisco.com/c/en/us/solutions/collateral/data-center-virtualization/application-centricinfrastructure/white-paper-c11-737909.html>

QUESTION 5

Which Cisco Nexus series switch supports NX-OS standalone mode or Application Centric Infrastructure (ACI) fabric mode?



- A. Nexus 7000
- B. Nexus 3000
- C. Nexus 9000
- D. Nexus 5000

Correct Answer: C

Reference: <https://www.cisco.com/c/en/us/products/collateral/switches/nexus-9000-series-switches/guide/c07-733228.html>

[NS0-173 Practice Test](#)

[NS0-173 Study Guide](#)

[NS0-173 Braindumps](#)