



NS0-181^{Q&As}

NetApp Certified Storage Installation Engineer - ONTAP 9.1

Pass NetApp NS0-181 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/ns0-181.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by NetApp
Official Exam Center


-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

Click the Exhibit button.

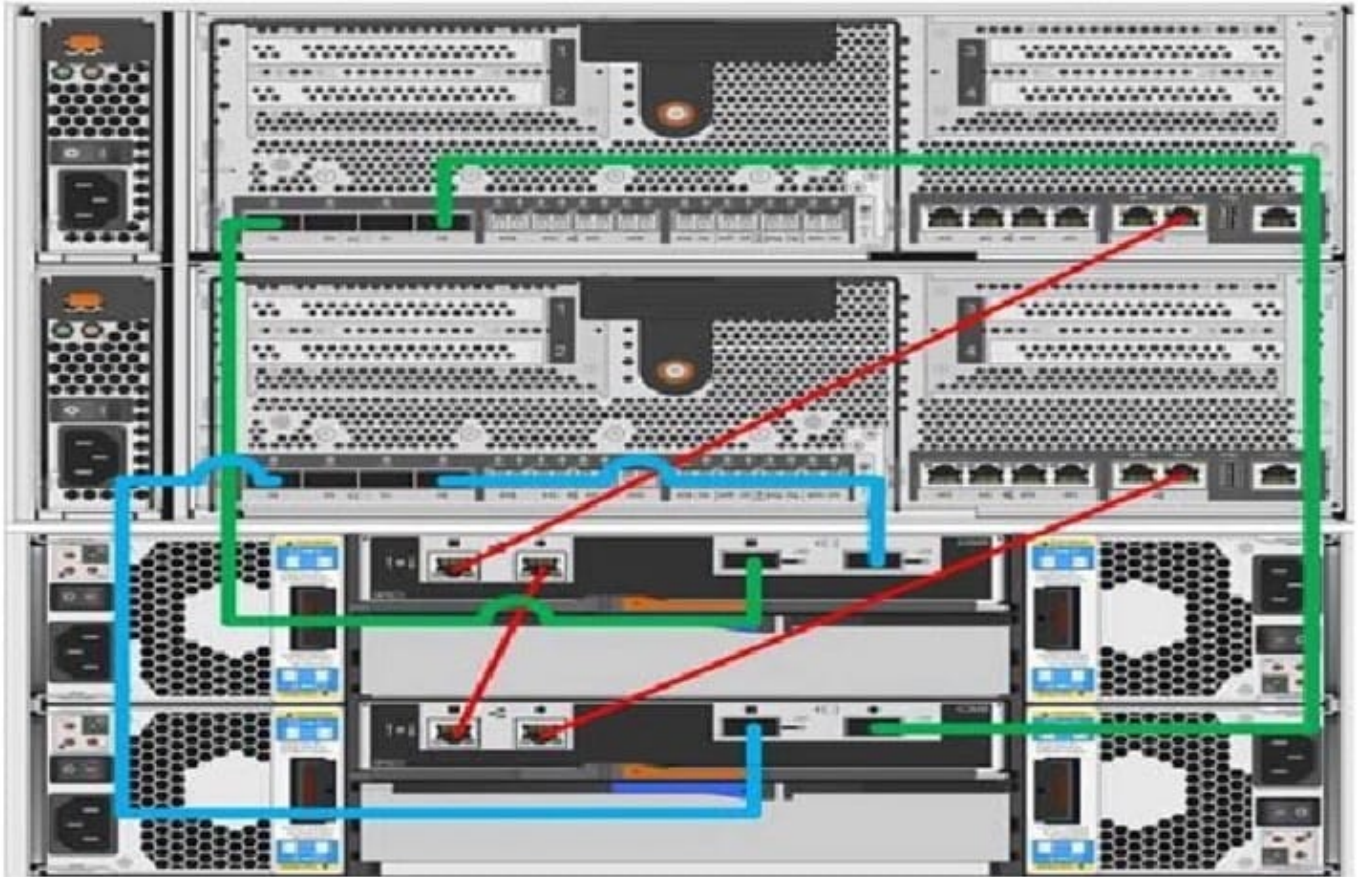

You are adding new DS224C shelves in a new stack to your cluster with FAS8060 controllers running ONTAP 9.7.

Referring to the exhibit, which two actions should be performed to the cluster before installing the new shelves?
(Choose two.)

- A. Move the SAS cables to a new stack.
- B. Enable in-band ACP.
- C. Remove the Ethernet cables.
- D. Disable out-of-band ACP.

Correct Answer: AD

QUESTION 2

You completed an ONTAP cluster deployment as a reseller engineer. During the knowledge transfer process to the customer, they ask for proof that the array has correct multi-path HA cabling deployed and that the array is error free. Which documentation output would you present to the customer to satisfy this requirement?



- A. Active IQ Unified Manager output
- B. NetAppDocs output
- C. Config Advisor output
- D. Active IQ OneCollect output

Correct Answer: C

Reference: <https://docs.netapp.com/platstor/topic/com.netapp.doc.hw-controller-add/GUID-64A51339-1F03-451C-B062-9F97E772817E.html>

QUESTION 3

You have installed and configured a new AFF C190 cluster with ONTAP 9.7. Your customer wants you to install the latest version of ONTAP. In this scenario, what are two methods to update ONTAP? (Choose two.)

- A. Use the cluster image package get and cluster image update commands.
- B. Use a USB drive with the new software image and let ONTAP automatically boot.
- C. Use ONTAP System Manager to download and install the new software image.
- D. Use ONTAP System Manager to upload and install the new software image.

Correct Answer: AC

QUESTION 4


A customer has a current AFF ASA A700 cluster and they want to expand the cluster by adding a second AFF ASA A700 HA pair. In this scenario, which step would be required to accomplish this task?

- A. Install a BES-53248 cluster switch and convert the AFF ASA A700 from a switchless to switch cluster.
- B. Enable ALUA between the two HA pairs to allow cluster backend traffic.
- C. The customer will need to create a separate cluster for the second AFF ASA A700 pair.
- D. Install a Brocade FC switch and create zoning between the original cluster and the new cluster.

Correct Answer: A

QUESTION 5

Click the Exhibit button.

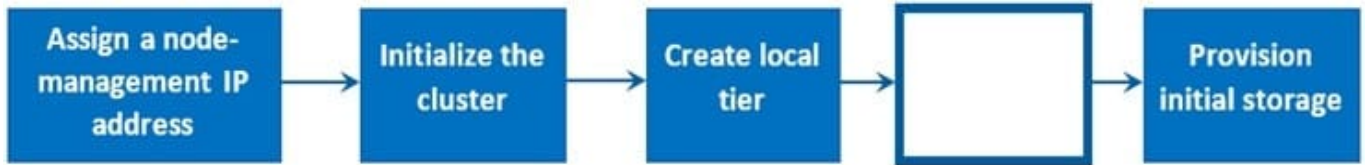

You plan to install a new ONTAP cluster at a customer site by using the new ONTAP System Manager 9.7 GUI. Referring to the exhibit, what must you do before you provision initial storage?

- A. Configure cluster LIFs.
- B. Configure protocols.
- C. Configure a remote tier.
- D. Configure aggregates.

Correct Answer: D

[NS0-181 PDF Dumps](#)

[NS0-181 Study Guide](#)

[NS0-181 Braindumps](#)