



NS0-183^{Q&As}

NetApp Certified Storage Installation Engineer, ONTAP

Pass NetApp NS0-183 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/ns0-183.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by NetApp
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

Click the Exhibit button.



You are installing a 2-node AFF A400 switchless cluster. You have cabled the management network to the e0M port. NetApp also recommends cabling to a redundant management network switch.

Referring to the exhibit, to which port should the redundant management network be cabled?

- A. 3
- B. 2
- C. 1
- D. 4

Correct Answer: D

QUESTION 2

Before installing an 8-node cluster for a customer, you want to validate compatibility with existing hardware.

Which two tools would you use to validate the configuration? (Choose two.)

- A. Active IQ Config Advisor
- B. Interoperability Matrix Tool
- C. Active IQ System Manager
- D. Hardware Universe

Correct Answer: AB

QUESTION 3

In an ONTAP 9.7 cluster, which LIF role is used for sending AutoSupport, establishing Network Time Protocol (NTP), and loading software updates?

- A. cluster management LIF



- B. node management LIF
- C. data LIF
- D. cluster LIF

Correct Answer: B

Reference: <https://docs.netapp.com/ontap-9/index.jsp?topic=%2Fcom.netapp.doc.dot-cm-nmg%2FGUIDDFFBE8D9-E824-4085-8FA2-24E367288CB8.html>

QUESTION 4

What are two ways to identify an AFF All SAN Array system? (Choose two.)


- A. View the ONTAP System Manager system nodes.
- B. View the ONTAP System Manager cluster settings.
- C. Use the cluster image show CLI command.
- D. Use the san config show CLI command.

Correct Answer: AD

Ways to identify an ASA system You can identify an ASA system using ONTAP System Manager or using the ONTAP command line interface (CLI). From the ONTAP System Manager dashboard, you can click on the system nodes. The personality type is displayed as "ASA" for ASA systems. From the CLI, you can use san config show command. The ASA value returns as true for ASA systems

QUESTION 5

Click the Exhibit button.

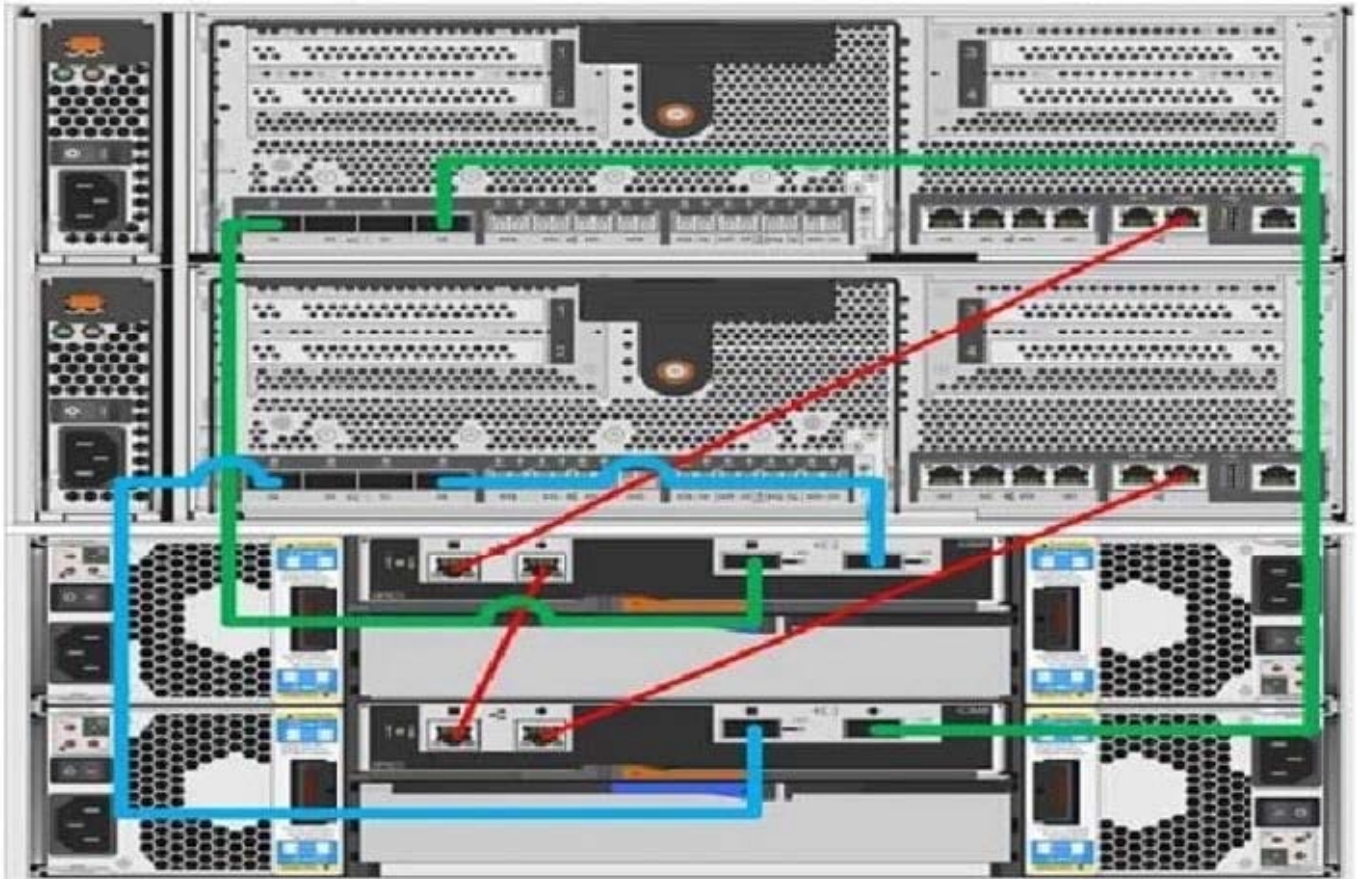

You are adding new DS224C shelves in a new stack to your cluster with FAS8060 controllers running ONTAP 9.7.

Referring to the exhibit, which two actions should be performed to the cluster before installing the new shelves?
(Choose two.)

- A. Move the SAS cables to a new stack.
- B. Enable in-band ACP.
- C. Remove the Ethernet cables.
- D. Disable out-of-band ACP.

Correct Answer: AD

[Latest NS0-183 Dumps](#)

[NS0-183 Study Guide](#)

[NS0-183 Exam Questions](#)