



# NSE7\_OTS-6.4<sup>Q&As</sup>

Fortinet NSE 7 - OT Security 6.4

## Pass Fortinet NSE7\_OTS-6.4 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

[https://www.passapply.com/nse7\\_ots-6-4.html](https://www.passapply.com/nse7_ots-6-4.html)

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by Fortinet Official Exam Center


-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





### QUESTION 1

Refer to the exhibit.

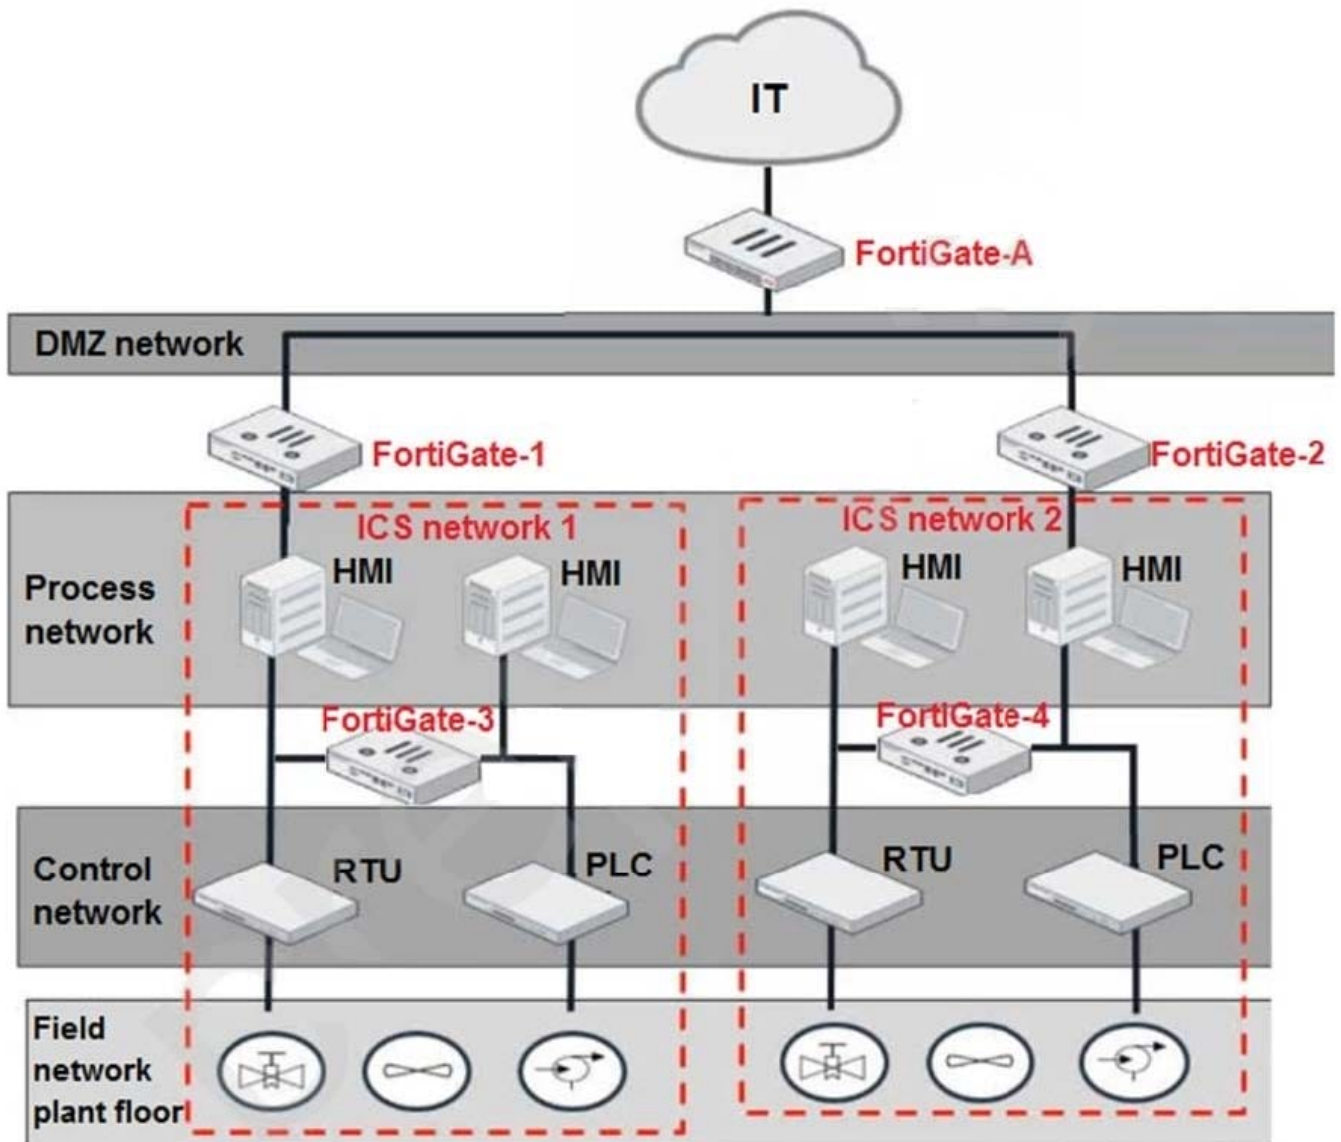

Based on the topology designed by the OT architect, which two statements about implementing OT security are true? (Choose two.)

- A. Firewall policies should be configured on FortiGate-3 and FortiGate-4 with industrial protocol sensors.
- B. Micro-segmentation can be achieved only by replacing FortiGate-3 and FortiGate-4 with a pair of FortiSwitch devices.
- C. IT and OT networks are separated by segmentation.
- D. FortiGate-3 and FortiGate-4 devices must be in a transparent mode.

Correct Answer: CD



### QUESTION 2

An OT supervisor needs to protect their network by implementing security with an industrial signature database on the FortiGate device.

Which statement about the industrial signature database on FortiGate is true?

- A. A supervisor must purchase an industrial signature database and import it to the FortiGate.
- B. An administrator must create their own database using custom signatures.
- C. By default, the industrial database is enabled.
- D. A supervisor can enable it through the FortiGate CLI.

Correct Answer: D

---

### QUESTION 3

What two advantages does FortiNAC provide in the OT network? (Choose two.)

- A. It can be used for IoT device detection.
- B. It can be used for industrial intrusion detection and prevention.
- C. It can be used for network micro-segmentation.
- D. It can be used for device profiling.

Correct Answer: CD

---

### QUESTION 4

An OT network architect needs to secure control area zones with a single network access policy to provision devices to any number of different networks.

On which device can this be accomplished?

- A. FortiGate
- B. FortiEDR
- C. FortiSwitch
- D. FortiNAC

Correct Answer: D

---

### QUESTION 5



Refer to the exhibit.



Based on the Purdue model, which three measures can be implemented in the control area zone using the Fortinet Security Fabric? (Choose three.)

- A. FortiGate for SD-WAN
- B. FortiGate for application control and IPS
- C. FortiNAC for network access control
- D. FortiSIEM for security incident and event management
- E. FortiEDR for endpoint detection

Correct Answer: BCD

[NSE7\\_OTS-6.4 PDF Dumps](#)

[NSE7\\_OTS-6.4 VCE Dumps](#)

[NSE7\\_OTS-6.4 Exam Questions](#)