



NSE7_SAC-6.2^{Q&As}

Fortinet NSE 7 - Secure Access 6.2

Pass Fortinet NSE7_SAC-6.2 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.passapply.com/nse7_sac-6-2.html

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Fortinet Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

Which two statements about the use of digital certificates are true? (Choose two.)

- A. An intermediate CA can sign server certificates.
- B. An intermediate CA can sign another intermediate CA certificate.
- C. The end entity's certificate can only be created by an intermediate CA.
- D. An intermediate CA can validate the end entity certificate signed by another intermediate CA.

Correct Answer: BD

QUESTION 2

What action does FortiSwitch take when it receives a loop guard data packet (LGDP) that was sent by itself?

- A. The receiving port is shut down.
- B. The sending port is shut down
- C. The receiving port is moved to the STP blocking state.
- D. The sending port is moved to the STP blocking state

Correct Answer: B

Reference: <https://www.scribd.com/document/468940309/Secure-Access-6-0-Study-Guide-Online-pdf>

QUESTION 3

Refer to the exhibit.



```
config wireless-controller wtp-profile
edit "Main Networks - FAP-320C"
    set comment "Profile with standard networks"
    config platform
        set type 320C
    end
    set handoff-rssi 30
    set handoff-sta-thresh 30
    set ap-country GB
    set allowaccess https ssh
    set login-passwd-change yes
    config radio-1
        set band 802.11n,g-only
        set channel-utilization enable
        set wids-profile "default-wids-apscan-enabled"
        set darrp enable
        set frequency-handoff enable
        set ap-handoff enable
        set vap-all disable
        set vaps "Guest" "Corporate"
        set channel "1" "6" "11"
    end
    config radio-2
        set band 802.11ac
        set channel-bonding 40MHz
        set channel-utilization enable
        set wids-profile "default-wids-apscan-enabled"
        set darrp enable
        set frequency-handoff enable
        set ap-handoff enable
        set vap-all disable
        set vaps "Guest" "Corporate"
        set channel "36" "44" "52"
    end
end
next
end
```

In the WTP profile configuration shown in the exhibit, the AP profile is assigned to two FAP-320 APs that are installed in an open plan office.

1.

The first AP has 32 clients associated to the 5GHz radios and 22 clients associated to the 2.4GHz radio.

2.

The second AP has 12 clients associated to the 5GHz radios and 20 clients associated to the 2.4GHz radio.

A dual band-capable client enters the office near the first AP and the first AP measures the new client at -33 dBm signal strength. The second AP measures the new client at -43 dBm signal strength.

In the new client attempts to connect to the corporate wireless network, to which AP radio will the client be associated?



- A. The second AP 5GHz interface.
- B. The first AP 2.4GHz interface.
- C. The first AP 5GHz interface.
- D. The second AP 2.4GHz interface.

Correct Answer: A

QUESTION 4

Which two EAP methods can use MSCHAPV2 for client authentication? (Choose two.)

- A. PEAP
- B. EAP-TTLS
- C. EAP-TLS
- D. EAP-GTC


Correct Answer: AC

Reference: https://help.fortinet.com/fauth/3-3/Content/FortiAuthenticator%203_3%20Admin%20Guide/500/501_EAP.htm

QUESTION 5

Refer to the exhibit.

Examine the network topology shown in the exhibit.

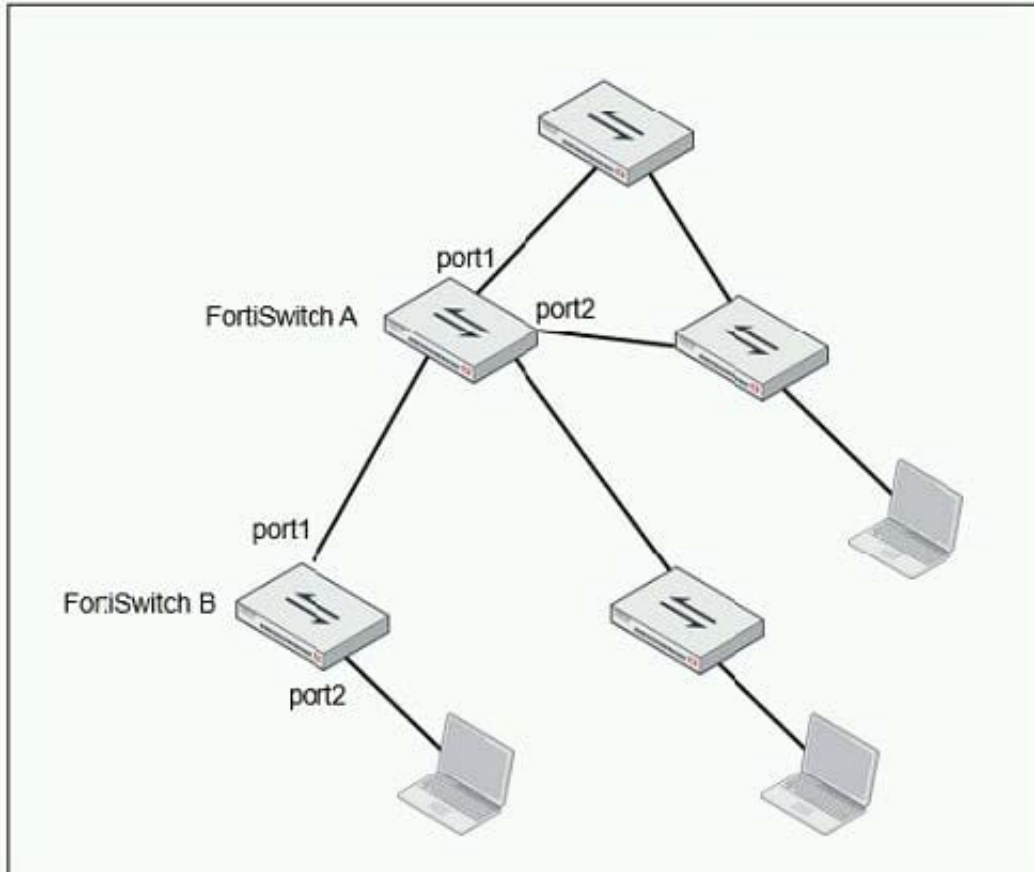

Which port should have root guard enabled?

- A. FortiSwitch A, port2
- B. FortiSwitch A, port1
- C. FortiSwitch B, port1
- D. FortiSwitch B, port2

Correct Answer: A

Reference: <https://docs.fortinet.com/document/fortiswitch/6.4.2/administration-guide/364614/spanningtree-protocol>

[NSE7_SAC-6.2 PDF Dumps](#)

[NSE7_SAC-6.2 Practice Test](#)

[NSE7_SAC-6.2 Study Guide](#)