



351-080^{Q&As}

CCIE Data Center Written

Pass Cisco 351-080 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/351-080.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

Cisco FabricPath uses what as a common bridge ID to connected Spanning Tree Protocol bridges?

- A. C84C.75FA.6000
- B. 0100.5E11.02FD
- C. C84C.76FA.6000
- D. 4000.0000.0001

Correct Answer: A

QUESTION 2

Refer to the exhibit.

Output of "show mac address-table" on Fabric Interconnect A

```

Legend:
 * - primary entry, G - Gateway MAC, (R) - Routed MAC, O - Overlay MAC
 age - seconds since last seen, * - primary entry using vPC Peer-Link
  ULAN      MAC Address      Type      age      Secure  NTFY      Ports
-----
 * 501      0025.b500.001d   dynamic   740      F       F       Ueth9856
 * 501      0025.b500.0035   dynamic   10       F       F       Eth5/1/6
 * 501      0025.b500.003c   dynamic   470      F       F       Ueth9578
 * 205      0025.b500.005c   static    0        F       F       Ueth2607
 * 70       0025.b500.006d   static    0        F       F       Ueth2107
 * 70       0025.b500.008d   static    0        F       F       Ueth1668
 * 60       0050.56a5.361e   dynamic   0        F       F       Eth1/1/4
 * 60       0050.56a5.3d91   dynamic   0        F       F       Eth1/1/4
 * 60       0050.56a5.53c3   dynamic   30       F       F       Eth1/1/4
 * 21       0002.3d80.0f0d   dynamic   0        F       F       Eth5/1/6
 * 6        0050.56a5.3a1d   dynamic   30       F       F       Eth1/1/4
 * 6        0050.56a5.6568   dynamic   30       F       F       Eth1/1/4
 * 6        0050.56a5.78c5   dynamic   30       F       F       Eth1/1/4
 * 6        269d.bf40.49e8   dynamic   750     F       F       Ueth32772
 * 6        5254.00be.5e0c   static    0        F       F       Ueth32772
 * 5        0002.3d20.0f0d   dynamic   10       F       F       Eth5/1/6
 * 4        0002.3d40.0f0d   dynamic   10       F       F       Eth5/1/6
 * 3        0050.5676.fdf1f  dynamic   10       F       F       Eth5/1/6
 * 3        0050.5679.e949   dynamic   0        F       F       Ueth2595
 * 3        0050.569d.0001   dynamic   60       F       F       Ueth2595
  
```

Fabric Interconnect A, operating in end-host mode, receives an ingress frame with source MAC address 0025.b500.0035 on uplink Eth1/19.

Which statements are true? (Choose two.)

- A. The frame will be accepted. Fabric Interconnect A will update its MAC address table to show that 0025.b500.0035 is dynamically learned on Eth1/19 and no longer dynamically learned on Eth5/1/6.
- B. Fabric Interconnect A will transmit a Gratuitous ARP for 0025.b500.0035 since it has moved ports, and the upstream network needs to be notified of the new location.
- C. Fabric Interconnect A will drop the frame.
- D. The MAC address table will not be updated as a result of receiving this frame on an uplink.




- E. Reverse Path Forwarding will determine whether or not this frame is dropped by Fabric Interconnect A.
- F. Deja vu will determine whether or not this frame is dropped by Fabric Interconnect A.

Correct Answer: CD

QUESTION 3

Refer to the exhibit.

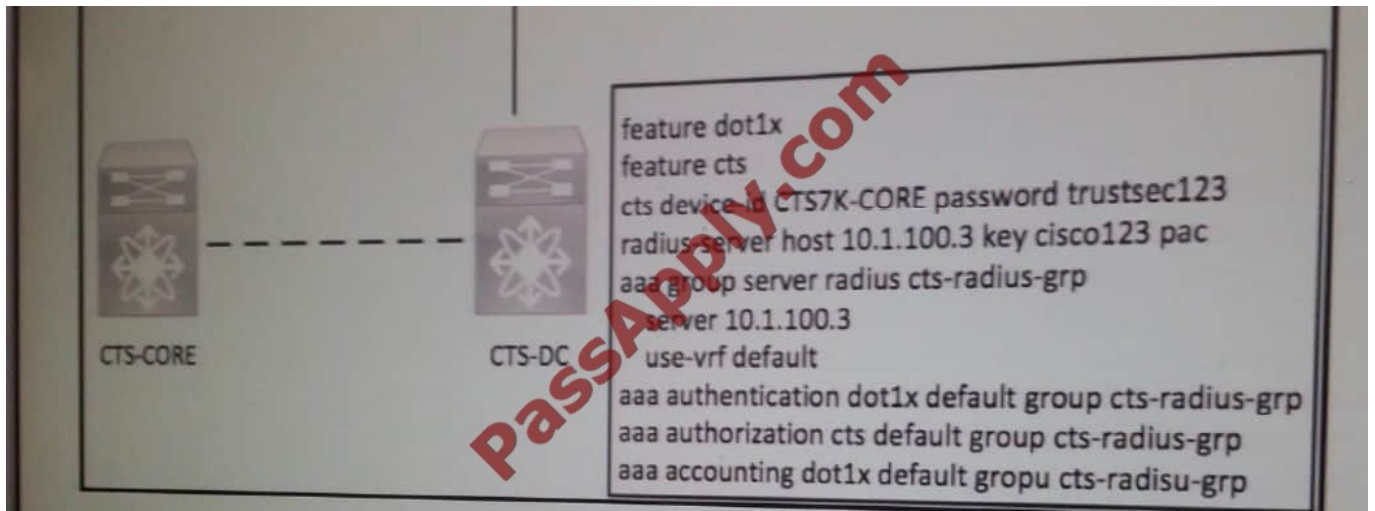

Company ABC has implemented a Cisco TrustSec domain with an initial Cisco ACS server and Cisco Nexus 7000 CTS-DC. The company plans to extend the domain by adding an additional Cisco Nexus 7000 CTS-CORE. Which three minimum configurations are required on CTS-CORE to join the domain? (Choose three.)

- A. Configure TrustSec domain.
- B. Configure interface "cts dot1x".
- C. Configure local device ID and password.
- D. Configure as a "non-seed" device.
- E. Configure feature dot1x and cts.
- F. Configure RADIUS authentication, authorization, and accounting.

Correct Answer: BCE

Explanation: Ref: http://www.cisco.com/c/en/us/td/docs/switches/datacenter/sw/4_1/nx-os/security/configuration/guide/sec_nx-os-cfg/sec_trustsec.html#wp1200631

QUESTION 4

Virtual PortChannels (vPCs) allow links that are physically connected to two different Cisco switches to appear to a third downstream device as coming from a single device and as part of a single port channel. Which of the following are components of a Virtual PortChannel system? (Choose four)



- A. Two peer devices: the vPC peers of which one is primary and one is secondary and are part of a vPC domain.
- B. A Layer 3 Gigabit Ethernet link called peer-keepalive link to resolve dual-active scenarios
- C. A redundant 10 Gigabit Ethernet PortChannel called a peer link to carry traffic from one system to the other when needed
- D. vPC member ports forming the PortChannel
- E. A dot1q trunk between the vPC peers
- F. A management port that can be used as peer-keepalive link to resolve dual-active scenarios.

Correct Answer: ABCD

QUESTION 5

Which statement about the iSCSI initiator task tag is true?

- A. The initiator assigns a task tag to each task it issues.
- B. The target assigns a task tag on behalf of the initiator.
- C. During the life of the task, this tag does not have to be unique.
- D. SCSI may not use this tag as part of the SCSI task identifier.

Correct Answer: A

QUESTION 6

Regarding disk scrub, which two of these occur to the data on any local drives upon disassociation? (Choose two.)

- A. If disk scrub is enabled, all BIOS settings for the server are erased.
- B. If disk scrub is enabled, all the data access on any local drives is destroyed.
- C. If disk scrub is enabled, the LSI active RAID is destroyed but data is still preserved.
- D. If disk scrub is disabled, all data on any local drives is preserved, including the local storage configuration.
- E. If disk scrub is enabled, all data on any local drives is preserved, including the local storage configuration.

Correct Answer: BD

QUESTION 7

Cisco NX-OS Software supports SNMPv1, SNMPv2c, and SNMPv3. Both SNMPv1 and SNMPv2c use a community-based form of security. SNMPv3 provides secure access to devices by a combination of authenticating and encrypting frames over the network. Which security features are provided in Cisco NX-OS SNMPv3? (Choose three.)



- A. encryption--scrambles the packet contents to prevent them from being seen by unauthorized sources
- B. password--a password (community string) sent in clear text between a manager and agent for added protection
- C. authentication--determines that the message is from a valid source
- D. message integrity--ensures that a packet has not been tampered with while it was in transit
- E. user--to determine if user authentication is used instead of community strings

Correct Answer: ACD

QUESTION 8

Which command sends a tet call home inventory message to start the registration process.

- A. test callhome inventory
- B. callhome inventory test
- C. callhome test inventory D. test inventory callhome

Correct Answer: C

QUESTION 9

Which three statements about the virtual service domain on Cisco Nexus 1000V Switch are true? (Choose three.)

- A. Any traffic coming or going out of the VSD must go through the service virtual machine.
- B. The show virtualservice_domainname command displays the configurations for this VSD port profile.
- C. Service virtual machine only snoops the data and is used for monitoring purposes.
- D. A VSD is collection of interfaces that are guarded by the service virtual machine.
- E. vMotion is supported for the service virtual machine and should not be disabled.
- F. A virtual service domain (VSD) allows you to classify and separate traffic for network services.

Correct Answer: ABD

QUESTION 10

Refer to the exhibit.



```
N5K(config)# show ip pim rp
PIM RP Status Information for VRF "default"
BSR disabled
Auto-RP RPA: unknown
BSR RP Candidate policy: None
BSR RP policy: None
Auto-RP Announce policy: None
Auto-RP Discovery policy: None

N5K(config)# show ip pim ne
PIM Neighbor Status for VRF "default"
Neighbor      Interface      Uptime      Expires      DR      Bidir-  BFD
Priority      Capable State
7.7.7.2       Vlan106       10:16:37    00:01:38    1       yes     n/a
```

RT1	RT2
<pre>feature pim ip pim send-rp-announce lo10 group-list 239.0.0.0/24 interface loopback10 ip address 9.9.9.1/24 ip router ospf 1 area 0.0.0.0 ip pim sparse-mode interface Vlan106 no shutdown ip address 7.7.7.2/24 ip router ospf 1 area 0.0.0.0 ip pim sparse-mode ip pim border</pre>	<pre>feature pim interface loopback10 ip address 8.8.8.1/24 ip router ospf 1 area 0.0.0.0 interface Vlan106 no shutdown ip address 7.7.7.1/24 ip router ospf 1 area 0.0.0.0 ip pim sparse-mode</pre>

The customer is trying to configure a rendezvous point, but for some reason it is failing. Which configuration should be applied on both Nexus devices to configure the rendezvous point?

- A. RT-2(config)#ip pim send-rp-discovery loopback10 RT-2(config)#interface lo0
- B. RT-2(config-if)#ip pim-sparse RT-2(config)#ip pim send-rp-announce lo10 group-list 239.0.0.0/24 RT-2(config)#interface lo0 RT-2(config-if)#ip pim-sparse
- C. RT-2(config)#ip pim send-rp-discovery loopback10 RT-2(config)#interface lo0 RT-2(config-if)#ip pim-sparse
- D. RT-1(config)#interface Vlan106 RT-1(config-if)#no ip pim border RT-2(config)# ip pim send-rp-announce lo10 group-list 239.0.0.0/24 RT-2(config)#interface lo0 RT-2(config-if)#ip pim-sparse
- E. RT-1(config)#interface Vlan106
- F. RT-1(config-if)#no ip pim border RT-2(config)# ip pim send-rp-discovery loopback10
- G. RT-1(config)#interface Vlan106 RT-1(config-if)#no ip pim border

Correct Answer: C

QUESTION 11




Which attribute is used to pass the user role back to the Nexus when remote AAA is enabled?

- A. Cisco AV-pair
- B. TACACS+ or RADIUS ack frame role attribute
- C. DH-CHAP challenge attribute
- D. privilege level attribute

Correct Answer: A

QUESTION 12

Refer to the Exhibit.

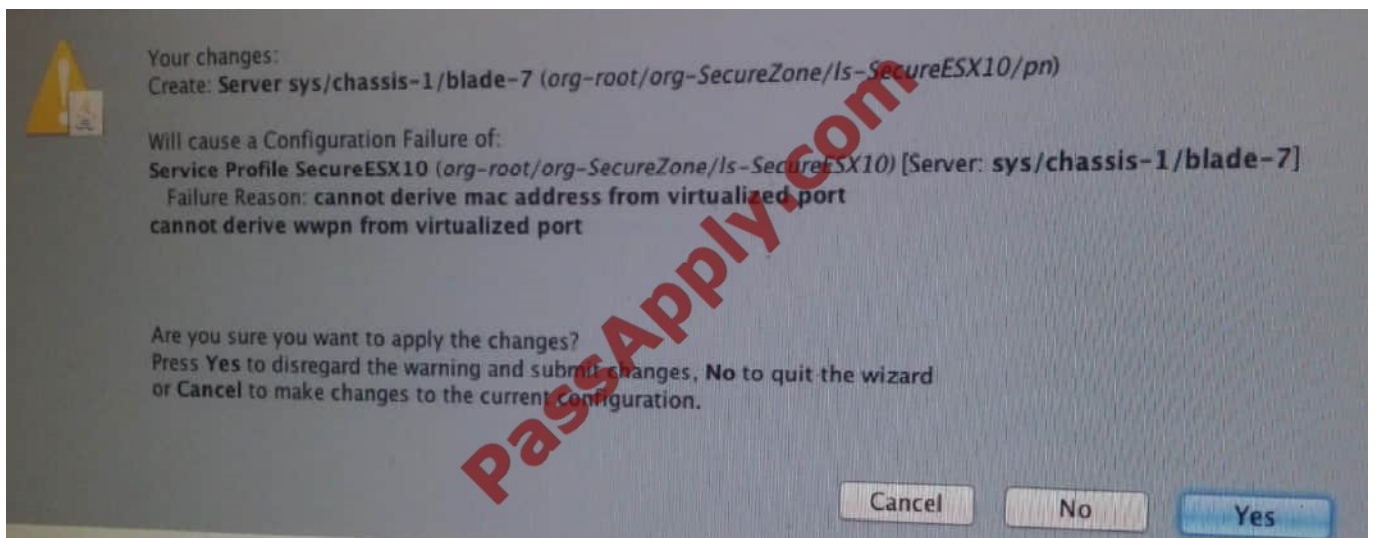

Which statement is true?

- A. The service profile in organization IS-SecureESX10 is trying to be associated to chassis 1 blade 7.
- B. The error is triggered when the service profile pn is being associated.
- C. The only way to fix the problem is to delete the service profile and start again with the proper MAC and WWPN pool association.
- D. If you ignore the warning and press Yes, the association fails because no MAC address is assigned.

Correct Answer: D

[Latest 351-080 Dumps](#)

[351-080 VCE Dumps](#)

[351-080 Practice Test](#)



To Read the [Whole Q&As](#), please purchase the [Complete Version](#) from [Our website](#).

Try our product !

100% Guaranteed Success
100% Money Back Guarantee
365 Days Free Update
Instant Download After Purchase
24x7 Customer Support
Average 99.9% Success Rate
More than 800,000 Satisfied Customers Worldwide
Multi-Platform capabilities - [Windows](#), [Mac](#), [Android](#), [iPhone](#), [iPod](#), [iPad](#), [Kindle](#)

We provide exam PDF and VCE of Cisco, Microsoft, IBM, CompTIA, Oracle and other IT Certifications. You can view Vendor list of All Certification Exams offered:

<https://www.passapply.com/allproducts>

Need Help

Please provide as much detail as possible so we can best assist you.
To update a previously submitted ticket:



 <p>One Year Free Update Free update is available within One Year after your purchase. After One Year, you will get 50% discounts for updating. And we are proud to boast a 24/7 efficient Customer Support system via Email.</p>	 <p>Money Back Guarantee To ensure that you are spending on quality products, we provide 100% money back guarantee for 30 days from the date of purchase.</p>	 <p>Security & Privacy We respect customer privacy. We use McAfee's security service to provide you with utmost security for your personal information & peace of mind.</p>
---	---	--

Any charges made through this site will appear as Global Simulators Limited.
All trademarks are the property of their respective owners.
Copyright © passapply, All Rights Reserved.