



Enterprise Voice & Online Services with Microsoft Lync Server 2013

Pass Microsoft 70-337 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.passapply.com/70-337.html

100% Passing Guarantee 100% Money Back Assurance

Following Questions and Answers are all new published by Microsoft Official Exam Center

Instant Download After Purchase

100% Money Back Guarantee

- 😳 365 Days Free Update
- 800,000+ Satisfied Customers





You need to configure DHCP to support the technical requirement for the Lync Phone Edition devices.

Which DHCP options should you include in the solution? (Each correct answer presents part of the solution. Choose all that apply.)

A. 40
B. 43
C. 80
D. 120
E. 144
Correct Answer: BD

QUESTION 2

You have a server named Lync1 that has Lync Server 2013 Standard Edition deployed.

Lync1 has Web Conferencing enabled. All client computers have Microsoft Lync 2013 deployed.

The network supports Differentiated Services (DiffServ).

The company plans to implement Quality of Service (QoS) for all Lync Server audio traffic.

You need to identify which tasks must be performed to configure QoS.

Which three tasks should you identify? (Each correct answer presents part of the solution. Choose three.)

- A. Configure Lync 2013 to use a specific port range for audio.
- B. Configure a QoS policy to use a specific port range for audio.
- C. Create a voice policy and a location policy.
- D. Set the Differentiated Services Code Point (DSCP) values used for audio as a priority.
- E. Configure Call Admission Control (CAC) for all subnets that contain Lync 2013 clients.

Correct Answer: ABD

QUESTION 3




You are designing the Lync Server 2013 infrastructure.

You need to identify the minimum number of Lync Server 2013 Mediation Servers, Lync Server 2013 trunks, and PSTN gateways that must be added to the New York office. The solution must meet the Enterprise Voice requirements.

What should you identify? To answer, configure the appropriate number for each component in the answer area.

Hot Area:

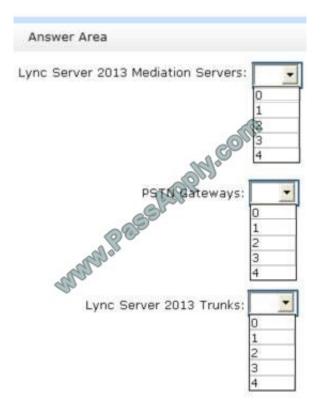



Answer	Area					
Lync Sen	ver 2013	Mediat	ion Sen	vers:	0	•
		PSTO	Gatew		3 4	
-98	on Percent	Jor .			1 2 3 4	
	Lync S	erver 2	013 Tru	nks:	0 1 2	
					3	

You need to configure the Lync Server 2013 infrastructure for the planned integration of the A. Datum users.


What should you configure from the Lync Server 2013 Control Panel? (To answer, drag the appropriate names to the correct locations. Each name may be used once, more than once, or not at all. You may need to drag the split bar between

panes or scroll to view content.)

Select and Place:



VCE & PDF PassApply.com

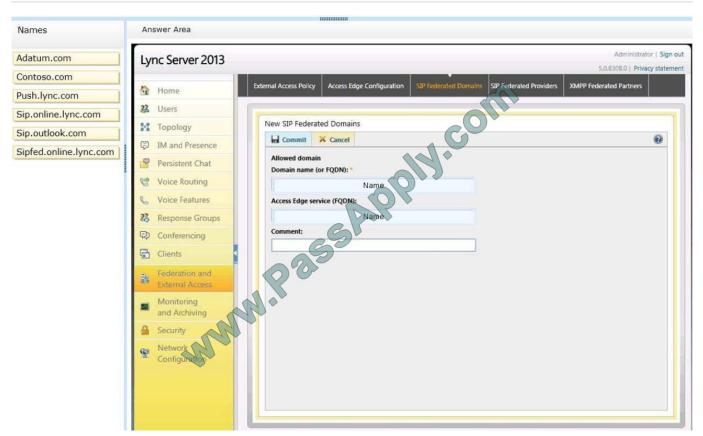

Names	Answer Area	
	Lync Server 2013 Administrator Sil	
Contoso.com Push.lync.com	Home External Access Policy Access Edge Configuration SIP Federated Domiains SIP Federated Providers XMPP Federated Partners	ement
Sip.online.lync.com Sip.outlook.com	Image: Second	
	Conferencing Clients Federation and External Access Monitoring and Archiving	
	Security Network Configuration	



You need to implement a solution to meet the phone number requirements.

Which four actions should you perform?

To answer, move the four appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Select and Place:

	1010
Actions	Answer Area
Create two announcement number ranges.	oly-com
Import two announcement files.	APP
Create two announcements.	
Modify the TEL URI of the users.	

Correct Answer:

Actions		Answer Area
		Import two announcement files.
		Create two announcements.
	and Beam	Create two announcement number ranges.
	do.	Modify the TEL URI of the users.

QUESTION 6



You need to identify which configurations must be implemented for the planned Lync Server 2013 deployment. The solution must meet the network requirements.

Which features should you use?

To answer, drag the appropriate features to the correct requirements in the answer area.

Each feature may be used once, more than once, or not at all. Additionally, you may need to drag the split bar between panes or scroll to view content.

Select and Place:

	10000000000	
Features	Answer Area	
Call Admission Control (CAC)	Limit the total bendwidth of all audio and video sessions from the	Feature
Differentiated Services (DiffServ)	Chicago office.	
Media bypass	Reduce the network utilization of Mediation servers.	Feature
Quality of Experience (QoE)	Prioritize Lync audio traffic on the network.	Feature

Correct Answer:

	International Contraction of Contrac
Features	Answer Area
	COUL
	Limit the total bardwidth of all
	audio and video sessions from the Call Admission Control (CAC)
	Chicago office.
	Reduce the network utilization of Media bypass
	Mediation servers.
Quality of Experience (QoE)	
Quality of Experience (QOE)	Prioritize Lync audio traffic on the Differentiated Services (DiffServ)

QUESTION 7

You are evaluating the implementation of the gateway in the Los Angeles office.

You need to ensure that least cost routing is used in the Los Angeles and Houston offices for local calls after the gateway is deployed. The solution must meet the technical requirements.

Which route should you assign to each PSTN usage?

To answer, drag the appropriate route to the correct PSTN usage in the answer area. Each route may be used once, more than once, or not at all. Additionally, you may need to drag the split bar between panes or scroll to view content.



Select and Place:

	1111111111111	_
Routes	Answer Area	
LocalHouston	LocalDialing Route Route	
LocalLA	PrimaryLongDistanceDialing Route	-
LDNY	BackupLongDistanceDialing Route	-
LDHouston		-
LDLA		

Correct Answer:

Routes	Answer Area	
	LocalDialing LocalLA	LocalHouston
	PrimaryLongDistanceDialing LDLA	<u>i</u>
	BackupLongDistanceDialing LDNY	
LDHouston	all	

QUESTION 8

Your network has a perimeter network and an internal network. A firewall named Firewall separates the perimeter network from the Internet. A firewall named Firewall2 separates the internal network from the perimeter network.

You have a Lync Server 2013 infrastructure that contains an Edge Server and a reverse proxy server in the perimeter network.

You plan to deploy XMPP federation.

You need to identify which firewall rules must be created for the planned deployment.

Which rule should you identify for each firewall?

To answer, configure the appropriate rules in the dialog box in the answer area.

Hot Area:



Answer Area		***********
Firewall name	Allowed port	Destination
Firewall 1	• 5061 5062 5269 23456	External interface of the Edge Server Internal interface of the Edge Server External interface of the reverse proxy serv Internal interface of the reverse proxy serve
Firewall2	5061 5062 5269 23456	External interface of the Edge Server Internal interface of the Edge Server External interface of the reverse proxy serv Internal interface of the reverse proxy serve

Correct Answer:

Answer Area		********
Firewall name	Allowed port	Destination
Firewall 1	• 5061 5062 5269 23456	External interface of the Edge Server Internal interface of the Edge Server External interface of the reverse proxy serv Internal interface of the reverse proxy serv
Firewall2	5051 5062 5269 23456	External interface of the Edge Server Internal interface of the Edge Server External interface of the reverse proxy serv Internal interface of the reverse proxy serve

QUESTION 9

You need to identify which Lync Server 2013 components must be deployed to each office to support the planned changes for voice resiliency.

Which components should you identify for each office?


To answer, select the appropriate component for each office in the answer area.



Hot Area:

New York	•
f	A media gateway
	A Standard Edition Front End Server
	A Survivable Branch Appliance server
	No additional components
200	
Miami	-O ⁸⁺ -
	A media gateway
	A Standard Edition Front End Server
	A Survivable Branch Appliance server
	No additional components
_	S
Los Angeles	-
LUS Angeles	100
22a	A media gateway
aller	A Standard Edition Front End Server
	A Survivable Branch Appliance server
	No additional components
Houston	
	A media gateway
	A Standard Edition Front End Server
	A Survivable Branch Appliance server
	No additional components



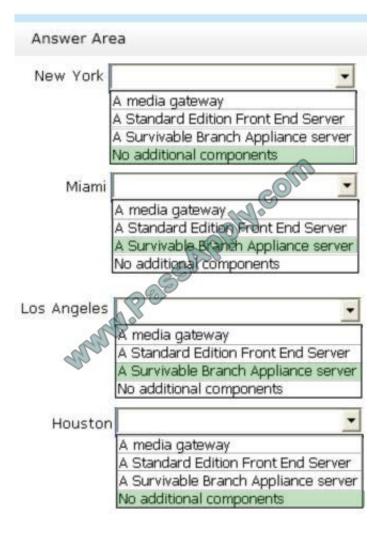

You have a Lync Server 2013 infrastructure.

You have one Enterprise Edition pool named pooll.contoso.com. Enterprise Voice is enabled for all users.

You have a PSTN gateway named mgl.contoso.com that does not support secure signaling. The Encryption support level of the global trunk configuration is set to Not Supported.

You add a second PSTN gateway named mg2.contoso.com. The SIP General parameters for mg2.contoso.com are configured as shown in the following table.



Setting	Value
SIP Transport Type	TLS
SIP UDP Local Port	5,060
SIP TCP Local Port	5,060
SIP TLS Local Port	5,067
Enable SIPS	Disable

On mg2.contoso.com, you generate and install a certificate from an internal certification authority (CA).

You need to ensure that Lync Server 2013 can use both PSTN gateways to make calls on the PSTN.

Which four actions should you perform?

To answer, move the four appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Select and Place:

Actions	Answer Area
From the Topology Builder, create a new PSTN gateway.	om
Create a new trunk configuration for mg2.contoso.com and set the Encryption support level to Not Supported .	ophy.com
Publish the topology.	AP
Add the trunk to the existing voice routes.	
Set the Encryption support level of the global trunk configuration to Required .	
Create a new trunk configuration for mg2.contoso.com and set the Encryption support level to Required .	



octions	Answer Area
	From the Topology Builder, create a new PSTN gateway.
Create a new trunk configuration for mg2.contoso.com and set the Encryption support level to Not Supported .	Publish the topology.
	Create a new trunk configuration for ng2.contoso.com and set the Encryption support evel to Required .
823	Add the trunk to the existing voice routes.
Set the Encryption support level of the global trunk configuration to Required .	

Your company has two main offices. The offices are located in Denver and New York. The offices connect to each other by using a WAN link.

You have a Lync Server 2013 infrastructure.

You have a conference that has 10 participants homed in the Denver office and 15 participants homed in the New York office. The user who organized the conference is homed in the Denver office. The audio codec for the conference

requires 101 Kbps per stream.

You need to identify how much bandwidth is used on the WAN link when a single participant speaks during the conference.

What should you identify? (To answer, select the appropriate bandwidth amounts in the answer area.)

Hot Area:



Bandwdth used from Denver to New York:		•
Sec. Sec. Sec. Sec. Sec. Sec. Sec. Sec.	101 Kbps 1,010 Kbps 1,515 Kbps	
Bandwidth used from New York to Denver:	2,525 Kbps	-
Solution ased from tex Tong to Deriver.	101 Kbps 1,010 Kbps	
dh	1,515 Kbps 2,525 Kbps	
Correct Answer:		

Bandwidth used from Denver to New York	C	-
	101 Rbps	
	1,010 Kbps	
3	1,515 Kbps	
	2,525 Kbps	
Close		0
Bandwidth used from New York to Denver		-
Sand and a source and a	101 Kbps	
and and a second and	101 Kbps	
Sold and a sold and a sold a s	And and a second se	

Your company has two offices. The offices are located in New York and Amsterdam. The dialing habits of the users in each office are shown in the following table.

Office	Phone number range	Dialing habit
New York	+1 212 555 1000 - 3000	 Local PSTN: 10 digit phone number Long distance calls within North America: 1 + 10- digit phone number International calls outside of North America: 011 + phone number
Amsterdam	+31 20 1234 500 - 510	 Cocal PSTN: 7-digit phone number Long distance calls within the Netherlands: 0 + 9- digit phone number International: 00 + phone number


You need to create a dial plan for the users in the Amsterdam office.

Which match patterns should you use in the normalization rules? To answer, select the appropriate match patterns in



the answer area.

Hot Area:

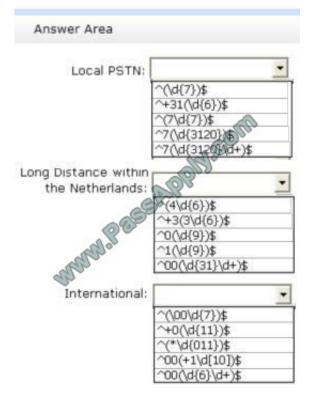

Answer Area	
Local PSTN:	•
	^(\d{7})\$
	^+31(\d{6})\$
	^(7\d{7})\$
	^7(\d{3120})\$ ^7(\d{3120}\d+)\$
1147-1404 H	1/ hul 3 teaplet 15
Long Distance within	
the Netherlands:	-9° -
e contra	₩(4\d{6})\$
a good	^+3(3\d{6})\$
	^0(\d{9})\$
allo	^1(\d{9})\$
alle	^00(\d{31}\d+)\$
International:	
	^(\00\d{7})\$
	^+0(\d{11})\$
	~(*\d{011})\$
	^00(+1\d[10])\$
	^00(\d{6}\d+)\$



Latest 70-337 Dumps

70-337 Practice Test

70-337 Braindumps



To Read the Whole Q&As, please purchase the Complete Version from Our website.

Try our product !

100% Guaranteed Success
100% Money Back Guarantee
365 Days Free Update
Instant Download After Purchase
24x7 Customer Support
Average 99.9% Success Rate
More than 800,000 Satisfied Customers Worldwide
Multi-Platform capabilities - Windows, Mac, Android, iPhone, iPod, iPad, Kindle

We provide exam PDF and VCE of Cisco, Microsoft, IBM, CompTIA, Oracle and other IT Certifications. You can view Vendor list of All Certification Exams offered:

https://www.passapply.com/allproducts

Need Help

Please provide as much detail as possible so we can best assist you. To update a previously submitted ticket:



One Year Free Update



Free update is available within One Year after your purchase. After One Year, you will get 50% discounts for updating. And we are proud to boast a 24/7 efficient Customer Support system via Email.



To ensure that you are spending on quality products, we provide 100% money back guarantee for 3<u>0 days</u>

Money Back Guarantee

from the date of purchase



Security & Privacy

We respect customer privacy. We use McAfee's security service to provide you with utmost security for your personal information & peace of mind.

Any charges made through this site will appear as Global Simulators Limited. All trademarks are the property of their respective owners. Copyright © passapply, All Rights Reserved.