



# HP2-T23<sup>Q&As</sup>

Supporting Industry Standard Server Solutions

**Pass HP HP2-T23 Exam with 100% Guarantee**

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/hp2-t23.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





### QUESTION 1

You are viewing the current driver and firmware status in the Version Control Agent (VCA) and notice that only one column of information is presented.

What must you do to see the current status and the latest revision available?

- A. Reboot the server to use the new VCA version, because the server has recently installed updates.
- B. Upgrade the System Management Homepage (SMH) VCA to the latest version to reflect the changes needed to access the new revisions.
- C. Set up the central management server (CMS) to check for the latest Service Pack for ProLiant (SPP) and push it to the VCA.
- D. Configure the VCA to use the Version Control Repository Manager (VCRM).

Correct Answer: B

---

### QUESTION 2

An engineer is installing an HP R7000 UPS and an Extended Runtime Module (ERM) in an existing HP 10642 G2 rack. This rack contains 10 ProLiant DL380e Gen8 servers mounted from 1U upward.

How should the engineer perform this installation?

- A. Mount the R7000 UPS at 10U in the 10642 G2 rack with the ERM on top of the R7000 UPS.
- B. Remove the lowest ProLiant DL380e Gen8 servers and mount the R7000 and the ERM at the lowest position in the rack. Mount the removed ProLiant DL380e Gen8 servers at a higher position in the 10642 G2 rack.
- C. Mount the R7000 at the highest position possible in the 10642 G2 rack with the ERM just below the UPS.
- D. Remove the two lowest mounted ProLiant DL380e Gen8 servers and mount the R7000 at the bottom of the 10642 G2 rack. Mount the two removed ProLiant DL380e Gen8 servers at the top of the 10642 G2 rack. Mount the ERM above the remaining original mounted ProLiant DL380e Gen8 servers.

Correct Answer: B

---

### QUESTION 3

Which software tool should you use to deploy an operating system to a ProLiant BL460c Gen8 server blade?

- A. System Management Homepage
- B. Array Configuration Utility
- C. SmartStart
- D. Intelligent Provisioning



Correct Answer: D

---

#### QUESTION 4

You are troubleshooting a problem with a ProLiant BL460c Gen8 server and need a report detailing the firmware and driver revisions on the server. Which report should you obtain?

- A. iLO Event Logs
- B. Array Diagnostics Report
- C. Integrated Management Log
- D. Active Health Logs

Correct Answer: B

---

#### QUESTION 5

Which Virtual Connect module enables FCoE or iSCSI connectivity for BladeSystem server blades?

- A. VC1/10Gb-F
- B. VC-FC8/24
- C. VC FlexFabric
- D. VCFlex-10

Correct Answer: C

---

#### QUESTION 6

What should a system administrator use to save an enclosure backup?

- A. HP One Button Disaster Recovery (OBDR)
- B. SmartStart Scripting Toolkit
- C. Amirrored drive
- D. Aconfiguration script

Correct Answer: D

---

#### QUESTION 7

After a system administrator replaces a system board on an HP server blade, the BIOS update fails. After it reboots, the server works with the old BIOS version.




What is the next step to troubleshoot this issue?

- A. Use RBSU to clear the NVRAM.
- B. Order a new system board
- C. Use a new Firmware Update CD.
- D. Attempt to reflash the BIOS again.

Correct Answer: D

### QUESTION 8

A support engineer is installing DIMMs of different speeds and voltages in a ProLiant DL380p Gen8 Server. Which rules for DIMM installation must the engineer follow during this installation?

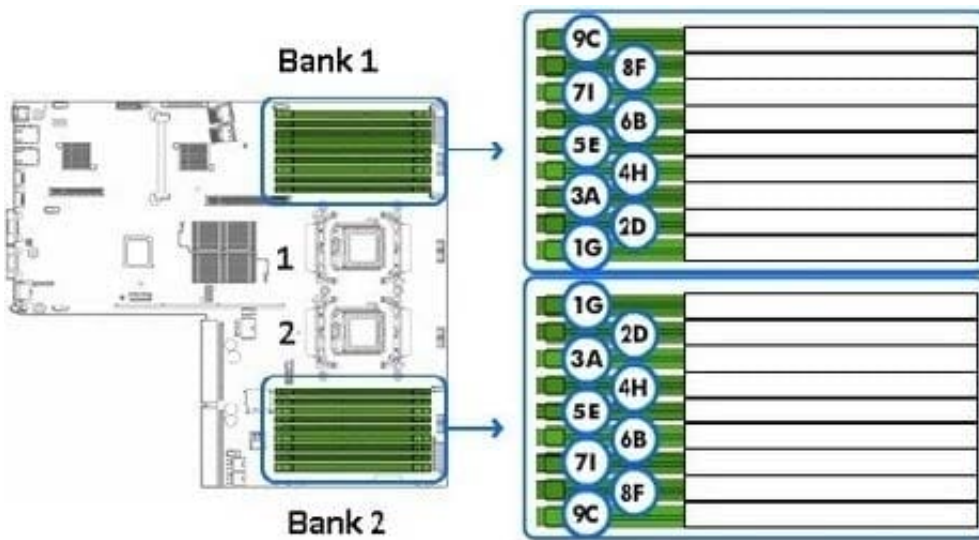

- A. Four quad-ranked LRDIMMs are supported across all memory channels. The server balances capacity automatically.
- B. RDIMMs operating at either 1.35V or 1.5V may be mixed in any order. The system will operate at the lower voltage.
- C. DIMMs of different speeds may be mixed in any order. The server will select the lowest common speed.
- D. UDIMMs, RDIMMs, and LRDIMMs may be mixed in the same bank in the server if only one processor is installed.

Correct Answer: BC

### QUESTION 9

Which statement describes the features of Service Pack for ProLiant (SPP)?

- A. SPP is a combination of the PSPs and the HP SmartUpdate Firmware DVD.
- B. SPP requires configuration through RBSU.



- C. SPP is the replacement for the Service and Diagnostics tools.
- D. SPP is supported only on servers running a Windows operating system.

Correct Answer: C

---

#### QUESTION 10

Which RAID level is known as Advance Data Guarding (ADG)?

- A. RAID 1
- B. RAID 5
- C. RAID 6
- D. RAID 10

Correct Answer: C

---

#### QUESTION 11

Why should you use an electrostatic discharge (ESD) wrist strap when replacing parts such as memory DIMMs?

- A. A 48 V DC PSU will contribute to higher static electricity.
- B. It incorporates high resistance and dissipates electrical charges into the ozone.
- C. A current of more than 75 mA can kill someone.
- D. It prevents the part from being damaged by static electricity.

Correct Answer: D

---

#### QUESTION 12

After you replace the system board in a ProLiantBL460c G8 server blade,the server cannot conned to an external shared storage through the SAS interface. Other similar servers in the same enclosure are in working condition. What should you check to verify that the physical hardware connectivity it connected?

- A. External storage power status
- B. ACU of the server blade for storage status
- C. Server bladeiLO tot hardware information detected by the management processor
- D. Server blade port mapping for theIOModule connectivity to the interconnect module

Correct Answer: D

---



#### QUESTION 13

How do you boot into Intelligent Provisioning on a ProLiant Gen8 server?

- A. By pressing the F9 button during POST
- B. By pressing the F10 button during POST
- C. Through a Scripting Toolkit server configuration script
- D. Through the Array Configuration Utility (ACU) in offline mode

Correct Answer: B

---

#### QUESTION 14

An HP VC Flex-10 module must be replaced in a c3000 BladeSystem enclosure because one uplink port is defective.

What must you do before physically replacing the module?

- A. Copy the VCM logs to a flash drive.
- B. Copy the server profiles to a flash drive.
- C. Back up the Virtual Connect settings.
- D. Back up the enclosure EBIPA information.

Correct Answer: C

---

#### QUESTION 15

What should be installed on a ProLiant Gen8 server to display operating system information within the iLO 4 GUI?

- A. System Management Home Page
- B. HP Management Agents
- C. Agentless Management Service
- D. ProLiant Support Pack

Correct Answer: C

[HP2-T23 PDF Dumps](#)

[HP2-T23 Practice Test](#)

[HP2-T23 Exam Questions](#)