HP2-T26$^{Q\&As}$

Servicing HP BladeSystem Solutions

Pass HP HP2-T26 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.passapply.com/hp2-t26.html

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center

Instant Download After Purchase

100% Money Back Guarantee

365 Days Free Update

800,000+ Satisfied Customers

QUESTION 1

You replace a fully buffered DIMM and want to verify it by running the ROM-Based Memory Test. Where can you access this test?

A. HP System Management Home Page

B. Insight Diagnostics Offline Edition

C. ROM-Based Setup Utility (RBSU)

D. HP Insight Diagnostics Online Edition

Correct Answer: B

QUESTION 2

What must be verified when replacing the Virtual Connect FlexFabric modules in a c7000 enclosure?

A. Baseboard Management Controller firmware on all server blades

B. Virtual Connect Manager SSO authentication with Onboard Administrator of the enclosure

C. Onboard Administrator firmware and LOM firmware on server blades

D. ILO firmware of the blade server located in bay 1 only

Correct Answer: C

QUESTION 3

When connected to the c7000 or c3000 enclosure service port how does a Windows-based laptop configured for DHCP acquire its IP address?

A. The laptop will receive an address in the 192.168.x.x address range from the DHCP server within the enclosure.

B. The laptop will receive an address in the 169.254.x.x address range from the DHCP server within the enclosure.

C. The laptop will timeout waiting for a DHCP server to respond and will assign itself an address in the 169.254.x.x address range.

D. The laptop will timeout waiting for a DHCP server to respond and must have an address manually assigned in the same subnet as the enclosure.

Correct Answer: A

QUESTION 4

During HP SIM automatic discovery, many unmanageable systems and systems that do not need to be managed are

discovered. What should you do to prevent this from happening?

A. Power down all unwanted systems prior to the discovery phase so they will not be detected and added to the database.

B. After all the systems are discovered, go back and delete the unwanted systems from the database.

C. Remove the agents from the unwanted systems so HP SIM will reject them during discovery.

D. Apply a filter to discard any systems that are not required, based on the type of system.

Correct Answer: D

QUESTION 5

The administrator password for the Onboard Administrator (OA) module has been lost. How does the system administrator recover this password? (Select three.)

A. select the factory reset option during reboot

B. press and hold the OA reset button for 5 seconds

C. connect the computer with terminal emulator to the serial port of the active OA

D. remove the OA module, close the reset jumper for 5 seconds, reseat the module

E. boot the system into Lost Password mode

F. connect to the OA via SSH using the service IP address

Correct Answer: BCE

QUESTION 6

Which type of memory can the Advanced Memory Buffer (AMB) in the Insight Diagnostics Offline Edition test?

A. Fully Buffered DIMMs

B. Unbuffered DIMMs

C. Registered DIMMs

D. Low Power DIMMs

Correct Answer: A

QUESTION 7

Place the background color of Insight Display next to its description. Note: Not all colors are used.

Select and Place:

Place the tackground color of Insigh Display next to its description.
Note: Not all colors are used.

Descriptions

green		indicates system health is good
blue		indicates system health is degraded
amber		indicates enclosure UID is active

| red | brown |

Select and Place:

Place the tackground color of Insigh Display next to its description.
Note: Not all colors are used.

Descriptions

green		indicates system health is good
blue		indicates system health is degraded
amber		indicates enclosure UID is active

| red | brown |

Correct Answer:

Place the tackground color of Insigh Display next to its description.
Note: Not all colors are used.

Descriptions

	green	is good
	amber	degraded
	blue	is active

| red | brown |

Green>>>>>>>Indicates System Health Is Good Blue>>>>>>>>Indicates Enclosure UID Is Active
Amber>>>>>>Indicates System Health Degraded

QUESTION 8

Which HP BladeSystem component is used for power allocation and control for all blades and interconnects?

A. Rack and Power Manager

B. Power Manager

C. Onboard Administrator

D. Insight Display

Correct Answer: C

QUESTION 9

What does a blinking amber LED usually indicate on a SATA hot plug drive?

A. The drive has failed.

B. The drive has a predictive failure.

C. The drive is active and busy.

D. The drive is active and offline.

Correct Answer: B

QUESTION 10

An administrator is struggling with the configuration of a c7000 enclosure and calls HP support for assistance. What is the best way to forward the inventory and event logs to HP support.

A. Capture the screen shots of the c7000 enclosure settings through OA.

B. Capture the integrated Management Log of all servers.

C. Capture the configuration scripts through the Onboard Administrator.

D. Capture the screen shots of insight Display.

Correct Answer: C

QUESTION 11

Place each deployment method next to its description.

Select and Place:

Descriptions

place here	Server boots to an environment where normal operations cannot occur until firmware updates complete.
place here	Installation tool runs on the physical hardware.
place here	Installation tool runs on one system but updates other physical targets.
place here	Installation runs while the host processor is running in the customer's normal environment.

| Offline | Remote | Online | Local |

Select and Place:

Descriptions

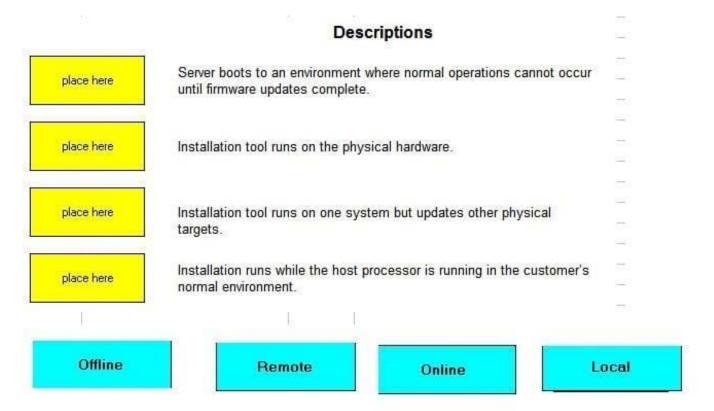| place here | Server boots to an environment where normal operations cannot occur until firmware updates complete. |
place here	Installation tool runs on the physical hardware.
place here	Installation tool runs on one system but updates other physical targets.
place here	Installation runs while the host processor is running in the customer's normal environment.

| Offline | Remote | Online | Local |

Correct Answer:

Descriptions

Offline	Server boots to an environment where normal operations cannot occur until firmware updates complete.
Local	Installation tool runs on the physical hardware.
Remote	Installation tool runs on one system but updates other physical targets.
Online	Installation runs while the host processor is running in the customer's normal environment.

QUESTION 12

Your customer has a business critical HP BladeSystem enclosure and wants to protect it with additional service coverage. The company\\'s requirements are 24x7 and functionality must be restored within a defined time.

Which HP Service offering is needed to fulfill the customer\\'s requirements?

A. HP Critical Advantage L3

B. HP Proactive Select 30 Credit

C. HP 6 hour Hardware Support Onsite Call-to-Repair Service

D. HP 24x7 hour Response, Hardware Support Onsite Service

Correct Answer: C

QUESTION 13

You replaced a defective memory module in a ProLiant Blade server. On Boot up, you noticed errors during POST, but the screen cleared before you could see what happened.

Where can you view these errors now that the server has booted up to Windows?

A. Windows Event Viewer Application log

B. HP Insight Diagnostic POST tab

C. Integrated Management log

D. HP Insight Diagnostics Diagnose tab

Correct Answer: C

QUESTION 14

Which resource can be used to identify the warranty status of an HP BL460c G6 Server Blade?

A. IT Resource Center

B. HP Service Advisory

C. HP Onboard Administrator

D. HP Service Dashboard

Correct Answer: D

QUESTION 15

What is used to automatically download software updates from HP?

A. HP Subscribers Choice

B. Version Control Agent (VCA)

C. HP Systems Insight Manager (HP SIM)

D. Version Control Repository Manager (VCRM)

Correct Answer: B