



# HPE6-A75<sup>Q&As</sup>

Aruba Certified Edge Professional Exam

**Pass HP HPE6-A75 Exam with 100% Guarantee**

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/hpe6-a75.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





### QUESTION 1

In a VPN that uses certificate-based authentication, which component must be configured on the Mobility Master (MM) to allow a RAP to successfully connect to a Mobility Controller (MC)

- A. RAP VPN username and password
- B. WLAN and new RAP group
- C. RAP IPSec pre-shared key
- D. RAP whitelist

Correct Answer: D

---

### QUESTION 2

An administrator configures the MultiZone feature for a company network, where a mobility cluster is the primary zone and a standalone controller in the company's DMZ represents a secondary data zone. The administrator configures two AP Groups and respective VAPs for the zones on the Mobility Master (MM) in the primary zone. When the APs boot up and establish connections to both zones, the administrator notices that no data connections are established to the data zone.

What must the administrator do to fix this problem?

- A. Configure the same AP Groups and VAPs on the standalone controller, and associate the MultiZone APs to both groups.
- B. Configure the same AP Group in the data zone as it is in the primary zone, and configure the VAPs in the data zone.
- C. Have the MultiZone APs initially boot from the standalone controller in the data zone.
- D. Create different AP groups and VAPs on the Mobility Master and standalone controllers, and associate the MultiZone APs to both groups.

Correct Answer: D

---

### QUESTION 3

Refer to the exhibit.



## Customize Form Fields

Use this list view to modify the fields of the form **create\_user**.

Rank	Field	Type	Label	Description
10	sponsor_name	text	Sponsor's Name:	Name of the person sponsoring this visitor account.
15	sponsor_email	text	Sponsor's Email:	Email of the person sponsoring this visitor account.
20	visitor_name	text	Visitor's Name:	Name of the visitor.
25	visitor_phone	text	Phone Number:	The visitor's phone number.
Edit  Edit Base Field  Remove  Insert Before  Insert After  Enable Field				
30	visitor_company	text	Company Name:	Company name of the visitor.
40	email	text	Email Address:	The visitor's email address. This will become their username to log into the network.
50	modify_start_time	dropdown	Account Activation:	Select an option for changing the activation time of this account.

Exhibit: accp67-433

Based on the configuration of me create\_user form shown, which statement accurately describes the status?

- A. The email field will be visible to guest users when they access the web login page.
- B. The visitor\_company field will be visible to operators creating the account.
- C. The visitor\_company field will be visible to the guest users when they access the web login page.
- D. The visitor\_phone field will be visible to the guest users in the web login page.
- E. The visitor\_phone field will be visible to operators creating the account.

Correct Answer: A

### QUESTION 4

Which is a valid policy simulation types in ClearPass? (Select three.)

- A. Enforcement Policy
- B. Posture token derivation
- C. Role Mapping



- D. Endpoint Profiler
- E. Chained simulation

Correct Answer: ACE

---

#### QUESTION 5

Which statement is true about the Endpoint Profiler? (Select two.)

- A. The Endpoint Profiler uses DHCP fingerprinting for device categorization.
- B. Data obtained from the Endpoint Profiler can be used in Enforcement Policy.
- C. Endpoint Profiler requires a profiling license.
- D. The Endpoint Profiler requires the Onboard license to be enabled.
- E. The Endpoint Profiler can only categorize laptops and desktops.

Correct Answer: AB

---

#### QUESTION 6

What must an OSPF router do when it receives a link state update?

- A. It must participate in a new election for the Designated Router and Backup DR.
- B. It must initiate a graceful restart timer.
- C. It must re-establish adjacency with its Designated Router and Backup DR.
- D. It must run the shortest path first algorithm.

Correct Answer: D

---

#### QUESTION 7

Refer to the exhibit.



Configuration » Enforcement » Policies » Edit - Vlan enforcement

## Enforcement Policies - Vlan enforcement

Summary	Enforcement	Rules
<b>Enforcement:</b>		
Name:	Vlan enforcement	
Description:		
Enforcement Type:	RADIUS	
Default Profile:	Internet VLAN	
<b>Rules:</b>		
Rules Evaluation Algorithm:	First applicable	
Conditions	Actions	
1. (Tips:Role EQUALS Engineer) AND (Date:Day-of-Week BELONGS_TO Monday, Tuesday, Wednesday, Thursday, Friday) AND (Connection:Protocol EQUALS RADIUS)	Full Access VLAN	
2. (Tips:Role EQUALS Manager) AND (Connection:Protocol BELONGS_TO RADIUS, TACACS, WEBAUTH, Application)	Full Access VLAN	
3. (Tips:Role EQUALS Engineer) AND (Connection:Protocol BELONGS_TO WEBAUTH)	Employee Vlan	

Based on the Policy configuration shown, which VLAN will be assigned when a user with ClearPass role Engineer authenticates to the network successfully on Saturday using connection protocol WEBAUTH?

- A. Deny Access
- B. Employee VLAN
- C. Internet VLAN
- D. Full Access VLAN

Correct Answer: B

### QUESTION 8

An administrator deploys Aruba Mobility Controller 7005s to a company's branch offices. The administrator wants to disable the console port to prevent unauthorized access to the controllers.

Which controller command should the administrator use to implement this policy?

- A. no console enable
- B. no mgmt-user console
- C. mgmt-user console-block
- D. console disable

Correct Answer: C

### QUESTION 9



An administrator supports a RAP to a branch office. Employees at the branch office connect to an employee SSID that allows for split tunneling of the employee traffic. The RAP initially connects to the corporate office controller, but later loses connectivity to it.


Which operating mode should the administrator configure for a secondary SSID to be advertised during the loss of connectivity?

- A. Standard
- B. Persistent
- C. Always
- D. Backup

Correct Answer: B

### QUESTION 10

Refer to the exhibit.

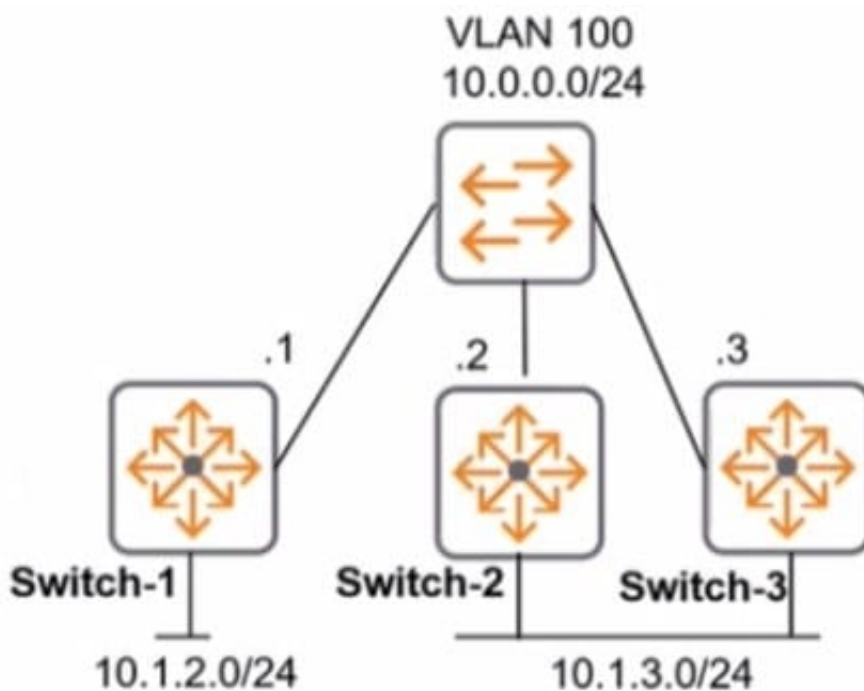

The network administrator wants to reduce failover time. If a switch link in VLAN 100 goes down, what should the administrator do?

- A. Configure echo mode BFD on VLAN 100 on all OSPF routing devices on VLAN 100.
- B. Lower the dead timer on the BDR of VLAN 100.
- C. Lower the hello timer only on the BDR of VLAN 100.
- D. Configure graceful restart on all of the OSPF routing devices on VLAN 100.



Correct Answer: A

[Latest HPE6-A75 Dumps](#)

[HPE6-A75 Study Guide](#)

[HPE6-A75 Exam Questions](#)