9A0-327^{Q&As}

9A0-327$^{Q\&As}$

Adobe CQ 5.5 Component Developer ACE Exam

Pass Adobe 9A0-327 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.passapply.com/9A0-327.html

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Adobe
Official Exam Center

🔧 **Instant Download** After Purchase

🔧 **100% Money Back** Guarantee

🔧 **365 Days** Free Update

🔧 **800,000+** Satisfied Customers

QUESTION 1

You want to change the configuration of a bundle during runtime in the repository. Which location has the highest priority?

A. /crx-quickstart/launchpad/config/* on the local file system

B. /apps/*/config/*

C. /libs/*/config/*

D. /etc/design/config/*

Correct Answer: B

QUESTION 2

What is the main purpose of the CQ HTML client library property that is called categories?

A. To easily find client libraries when the user searches categories in the author environment.

B. To uniquely name a group of client libraries to be included in templates or components and to reference dependencies to other client libraries.

C. To link the categories name with the component name, so that the client library can be included automatically into the component.

D. To define the type of files that the client library contains, e.g. JavaScript and/or CSS.

Correct Answer: B

QUESTION 3

Which xtype should you use if you want to reuse a part of a dialog in another dialog?

A. browsedialog.

B. tabpanel.

C. cqinclude.

D. referencesdialog.

Correct Answer: C

QUESTION 4

You have configured the cached properly in the dispatcher module. What is the difference between:

request 1 = /content/mypage/mypic.small.png and request 2 = /content/mypage/mypic.png?size=small

A. NO difference. Request 1 and request 2 both get cached

B. request 1 gets cached, request 2 does not get cached

C. request 2 gets cached, request 1 does not get cached

D. NO difference. Neither request 1 nor request 2 get cached

Correct Answer: B

QUESTION 5

You have a component "A" that has a dialog and four JSP scripts: main.jsp, script1.jsp, script2.jsp and script3.jsp. The script main.jsp includes the other three scripts. Now you implement component "B", which is very similar to component "A", but with a different script2.jsp script. Component "B" declares "A" as its resourceSuperType. What is the best way to implement script2.jsp for Component "B"?

A. Copy all the dialog nodes from "A" to the component folder "B" and write script2.jsp

B. Write script2.jsp and copy main.jsp, which includes script2.jsp, from component "A" to "B".

C. Since the dialog will be inherited, copy only all the jsp files from component "A" to "B" and write a new script2.jsp.

D. Only write a new script2.jsp.

Correct Answer: D

9A0-327 PDF Dumps   9A0-327 Practice Test   9A0-327 Study Guide

To Read the Whole Q&As, please purchase the Complete Version from Our website.
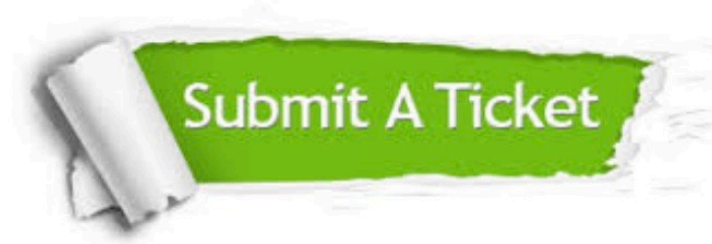
Try our product !

100% Guaranteed Success
100% Money Back Guarantee
365 Days Free Update
Instant Download After Purchase
24x7 Customer Support
Average 99.9% Success Rate
More than 800,000 Satisfied Customers Worldwide
Multi-Platform capabilities - Windows, Mac, Android, iPhone, iPod, iPad, Kindle

We provide exam PDF and VCE of Cisco, Microsoft, IBM, CompTIA, Oracle and other IT Certifications.
You can view Vendor list of All Certification Exams offered:

https://www.passapply.com/allproducts

Need Help

Please provide as much detail as possible so we can best assist you.
To update a previously submitted ticket: