



MCD-LEVEL1-DELTA^{Q&As}

MuleSoft Certified Developer - Level 1 (Mule 4) DELTA

Pass Mulesoft MCD-LEVEL1-DELTA Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/mcd-level1-delta.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Mulesoft
Official Exam Center


-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

Refer to the exhibits.

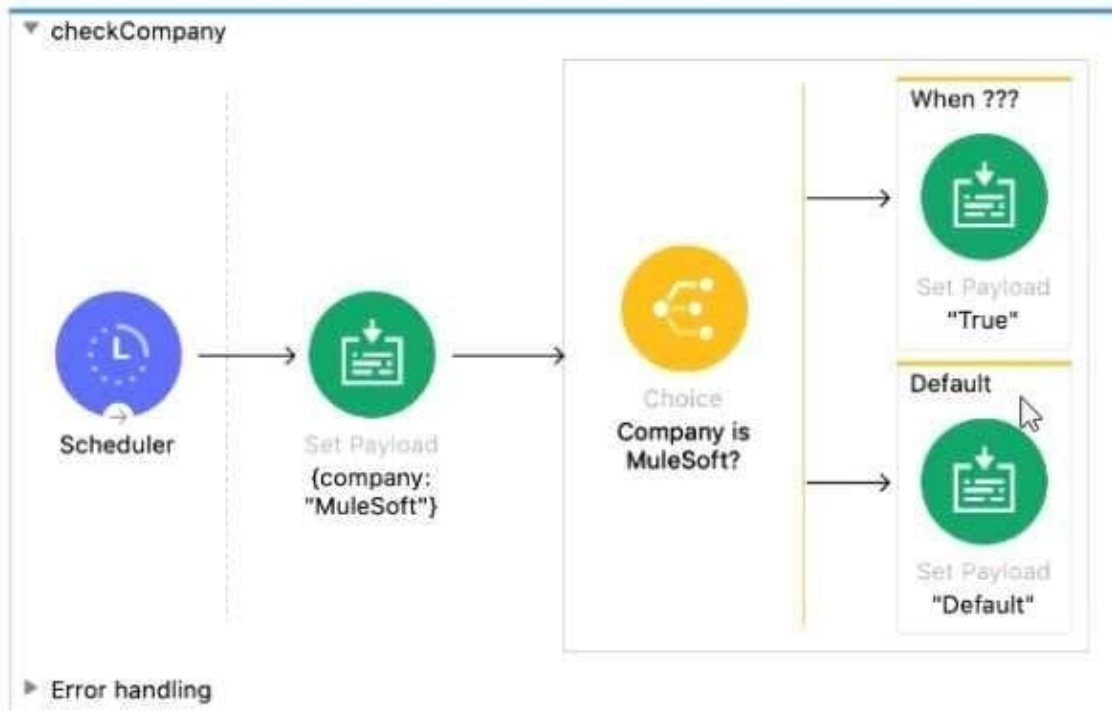

```
<flow name="checkCompany">
  <scheduler doc:name="Scheduler">
    <scheduling-strategy>
      <fixed-frequency frequency="5000" />
    </scheduling-strategy>
  </scheduler>
  <set-payload value="#[{company: "MuleSoft"}]" doc:name="{company: "MuleSoft"}" />
  <choice doc:name="Company is MuleSoft?">
    <when expression="When ???">
      <set-payload value="#["True"]" doc:name="True" />
    </when>
    <otherwise>
      <set-payload value="#["Default"]" doc:name="Default" />
    </otherwise>
  </choice>
</flow>
```

The expression for the Choice router needs to be written. What is a valid expression to route Mule events to the non-default flow?

- A. #[\MuleSoft\ == payload.company]
- B. #[company = "MuleSoft"]
- C. #[if(company = "MuleSoft")]
- D. #[if(\MuleSoft == payload.company)]



Correct Answer: A

QUESTION 2

What is the object type returned by the File List operation?

- A. Object of String file names
- B. Array of String file names
- C. Object of Mule event objects
- D. Array of Mule event objects

Correct Answer: D

QUESTION 3

An API specification is designed using RAML. What is the next step to create a REST Connector from this API specification?

- A. Download the API specification and build the interface using APIkit
- B. Publish the API specification to Any point Exchange
- C. Implement the API specification using flow designer in Design Center
- D. Add the specification to a Mule project's src/main/resources/api folder

Correct Answer: B

QUESTION 4

How is policy defined in terms of classloader of an API?

- A. Classloader isolation does not exist between the application, the runtime and connectors, and policies.
- B. Classloader isolation exists between the application, the runtime and connectors, and policies.
- C. None of these.
- D. Classloader isolation partially exists between the application, the runtime and connectors, and policies.

Correct Answer: B

QUESTION 5

Refer to the exhibit.



```
<flow name="validatePayload" >  
  <http:listener doc:name="HTTP: GET /" config-ref="HTTP_Listener_config" path="/" />  
  <set-payload value="Before" doc:name="Before" />  
  <validation:is-null doc:name="payload" value="#[payload]" message="Validation Error" />  
  <set-payload value="After" doc:name="After" />  
</flow>
```

What is the response to a web client request to http://localhost:8081?

- A. After
- B. before
- C. Validation Error
- D. null

Correct Answer: A

[Latest MCD-LEVEL1-DELTA Dumps](#)

[MCD-LEVEL1-DELTA Study Guide](#)

[MCD-LEVEL1-DELTA Braindumps](#)