



MCD-LEVEL1-DELTA^{Q&As}

MuleSoft Certified Developer - Level 1 (Mule 4) DELTA

Pass Mulesoft MCD-LEVEL1-DELTA Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/mcd-level1-delta.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Mulesoft
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers






QUESTION 1

Refer to the exhibits.

```
##RAML 1.0
title: ACME Order API
version: 1.0
```

```
/order:
  post:
    body:
      application/xml:
        example: |
          <order oid="1001">
            <customerName>Annie Point
            </customerName>
            <itemName>Electric Standing Desk
            </itemName>
            <cost>300.00</cost>
          </order>
```

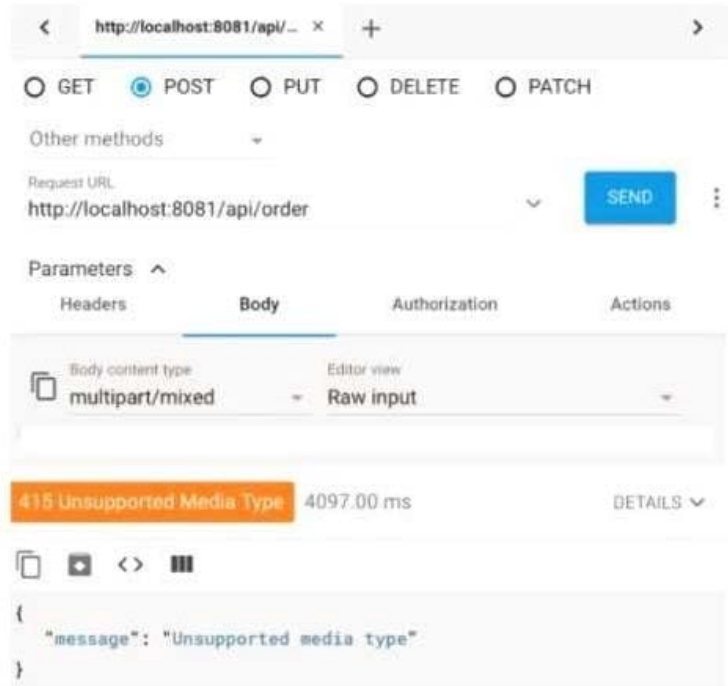

The web client sends a POST request to the ACME Order API with an XML payload. An error is returned. What should be changed in the request so that a success response code is returned to the web client?

- A. Set a request header with the name Content-Type to a value of `applicatron/octet-stream`
- B. Set a request header with the name Content-Type to a value of `application/xml`
- C. Set a response header with the name Content-Type to a value of `applkation/xml`
- D. Set a response header with the name Content-Type to a value of `application/octet-stream`

Correct Answer: B

QUESTION 2

Anypoint MQ FIFO queues are limited to how many in flight messages per queue?


- A. 120000
- B. 10
- C. 100
- D. 1000



Correct Answer: B

QUESTION 3

Refer to the exhibit.

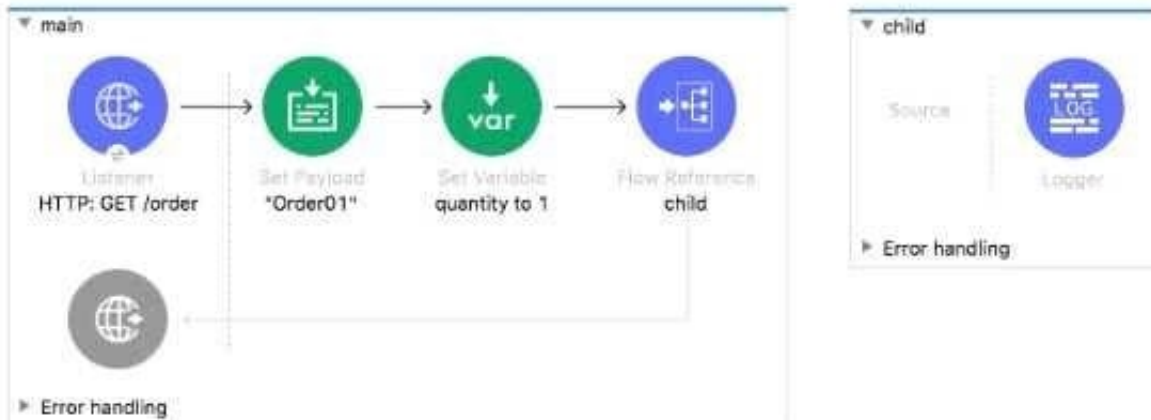


The main flow contains a Flow Reference for the child flow. What values are accessible in the child flow after a web client submits a request to `http://localhost:8081/order?color=red`?

- A. payload
- B. payload quantity var
- C. payload color query param
- D. payload quantity var color query param

Correct Answer: D

QUESTION 4

Refer to the exhibits.

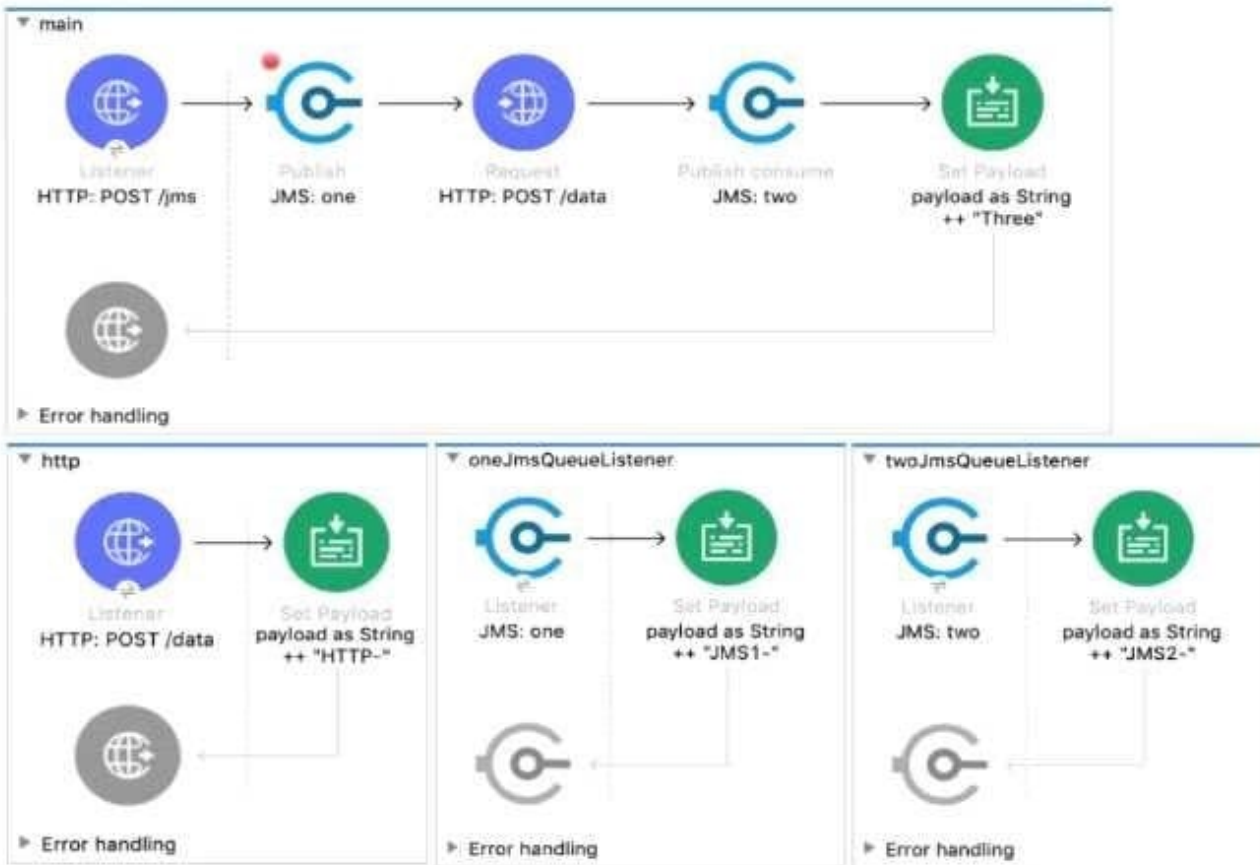

```
<flow name="main">
  <http:listener doc:name="HTTP: POST /jms" config-ref="HTTP_Listener_config" path="/jms" />
  <jms:publish doc:name="JMS: one" config-ref="JMS_Config" destination="one" >
    <jms:message outboundContentType="text/plain" />
  </jms:publish>
  <http:request method="POST" doc:name="HTTP: POST /data" url="http://localhost:8081/data"/>
  <jms:publish-consume doc:name="JMS: two" config-ref="JMS_Config" destination="two">
    <jms:message outboundContentType="text/plain" />
  </jms:publish-consume>
  <set-payload value='#[payload ++ "Three"]' doc:name='payload as String ++ "Three"' />
</flow>
```

A web client sends a POST request to the HTTP Listener with the payload "Hello-". What response is returned to the web client? What response is returned to the web client?


- A. Hello- HTTP-] MS2-Three
- B. HTTP-JMS2-Three
- C. Helb-JMS1-HTTP-JMS2 -Three
- D. Hello-HTTP-Three

Correct Answer: A

QUESTION 5



Refer to the exhibit.

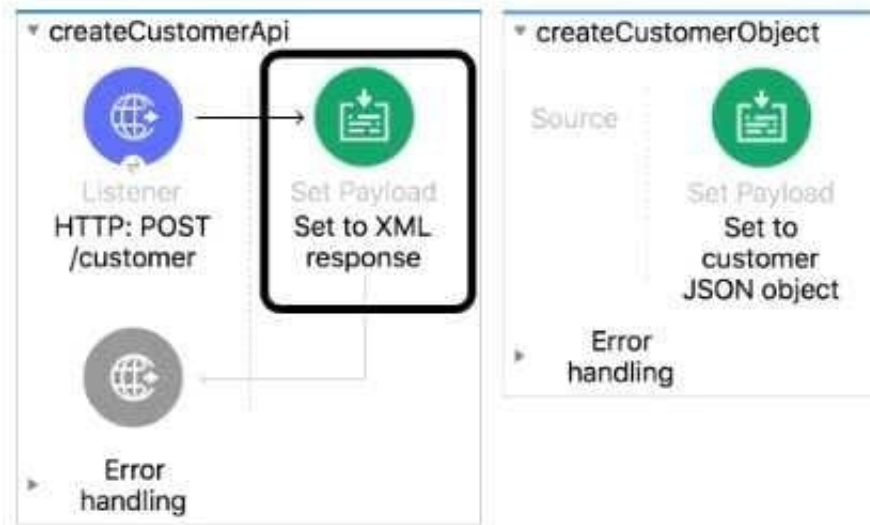

What is the correct DataWeave expression for the Set Payload transformer to call the createCustomerObject flow with values for the first and last names of a new customer?

- A. lookupC createCustomerObject("Alice", "Green-))
- B. createCustomerObject({ first: "Alice", last: "Green" } >)
- C. lookup "createCustomerObject", { first: "Alice", last: "Green" } >)
- D. createCustomerObject("Alice", "Green")

Correct Answer: C

[Latest MCD-LEVEL1-DELTA Dumps](#)

[MCD-LEVEL1-DELTA VCE Dumps](#)

[MCD-LEVEL1-DELTA Exam Questions](#)