



MCD-LEVEL1-DELTA^{Q&As}

MuleSoft Certified Developer - Level 1 (Mule 4) DELTA

Pass Mulesoft MCD-LEVEL1-DELTA Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/mcd-level1-delta.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Mulesoft
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

Refer to the exhibits.

```
1 training:
2   host: "mu.learn.mulesoft.com"
3   port: "80"
4   basepath: "/"
5   protocol: "HTTP"
```


A Mule application has an HTTP Request that is configured with hardcoded values. To change this, the Mule application is configured to use a properties file named config.yaml. what valid expression can the HTTP Request host value be set to so that it is no longer hardcoded?

- A. `${training.host}`
- B. `#{training:host}`
- C. `#[training:host]`
- D. `#[training.host]`

Correct Answer: A

QUESTION 2

Refer to the exhibits.

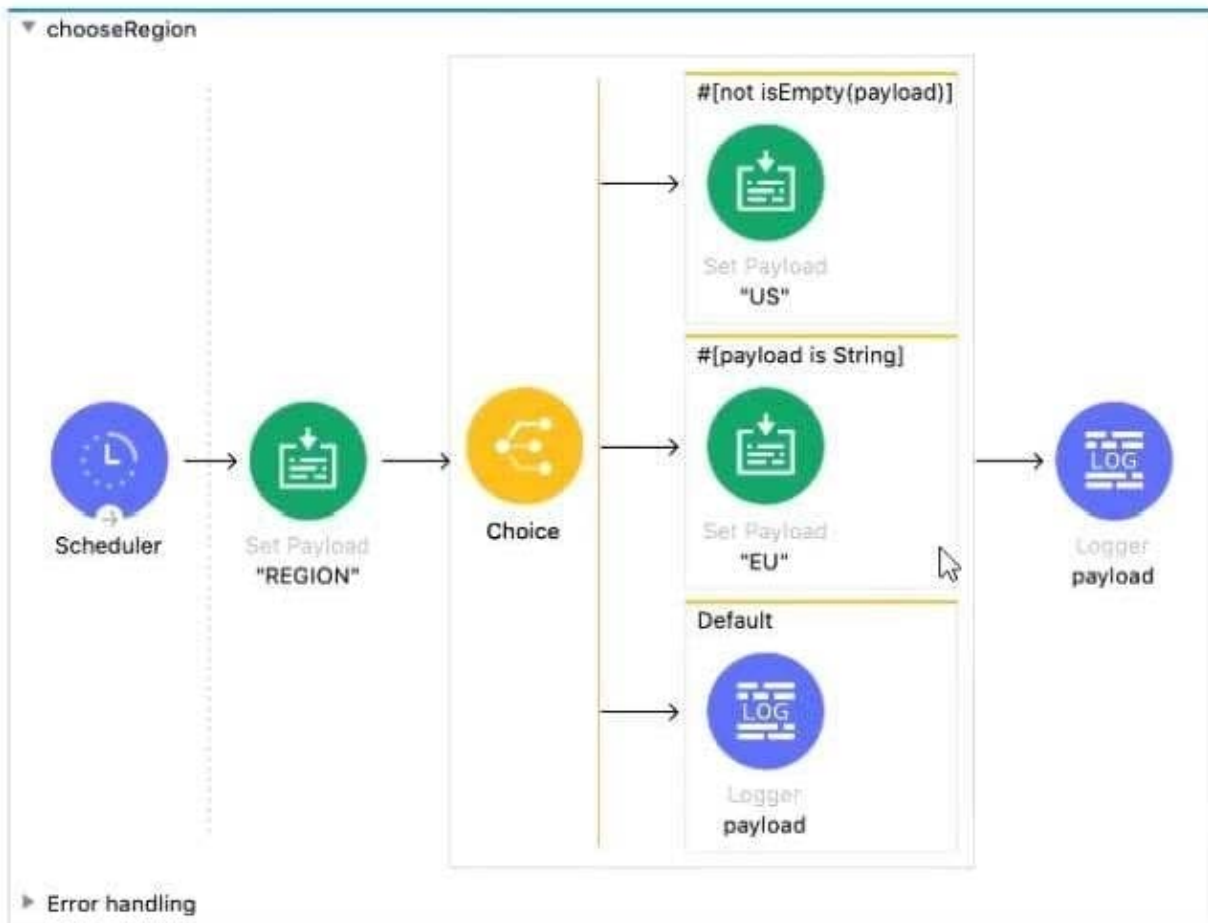

```
<flow name="chooseRegion" >
  <scheduler doc:name="Scheduler" >
    <scheduling-strategy >
      <fixed-frequency frequency="5000"/>
    </scheduling-strategy>
  </scheduler>
  <set-payload value='#["REGION"]' doc:name="REGION" />
  <choice doc:name="Choice" >
    <when expression='#[not isEmpty(payload)]'>
      <set-payload value='#["US"]' doc:name="US" />
    </when>
    <when expression='#[payload is String]'>
      <set-payload value='#["EU"]' doc:name="EU" />
    </when>
    <otherwise>
      <logger level="INFO" doc:name="payload" message="#[payload]"/>
    </otherwise>
  </choice>
  <logger level="INFO" doc:name="payload" message="#[payload]"/>
</flow>
```

A Mule application contains a Choice router. What is logged when the flow completes? A.EU

B. US



C. "REGION"

D. ["US", "EU"]

Correct Answer: B

QUESTION 3

A function named newProdCode needs to be defined that accepts two input parameters, an integer value for itemID and a string value for productCategory, and returns a new product code. What is the correct DataWeave code to define the newProdCode function?

A. fun newProdCode(itemID: Number, productCategory: String) --> "PC-" ++ productCategory ++ (itemID as String)

B. fun newProdCode(itemID: Number, productCategory: String) = "PC-" ++ productCategory ++ (itemID as String)

C. function newProdCode(itemID: Number, productCategory: String) = "PC-" ++ productCategory ++ (itemID as String)

D. var newProdCode(itemID: Number, productCategory: String) -> "PC-" ++ productCategory ++ (itemID as String)

Correct Answer: B

QUESTION 4

What valid RAML retrieves details on a specific by its orderId as a URL parameter?

A.

```
/orders:  
  /{orderId}:  
    get:
```

B.

```
/orders:  
  /orderId:  
    get:
```

C.

```
/orders:  
  get:  
    /{orderId}:
```

D.

```
/orders:  
  get:  
    /orderId:
```

A. Option A

B. Option B

C. Option C



D. Option D

Correct Answer: A

QUESTION 5

What DataWeave 2.0 type can be used as input to a map operation?

A. Object

B. Array

C. String

D. Map

Correct Answer: B

[MCD-LEVEL1-DELTA VCE
Dumps](#)

[MCD-LEVEL1-DELTA
Practice Test](#)

[MCD-LEVEL1-DELTA Exam
Questions](#)