



NSE6_FML-6.2^{Q&As}

Fortinet NSE 6 - FortiMail 6.2

Pass Fortinet NSE6_FML-6.2 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.passapply.com/nse6_fml-6-2.html

100% Passing Guarantee
100% Money Back Assurance




Following Questions and Answers are all new published by Fortinet
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



**QUESTION 1**

Refer to the exhibit.

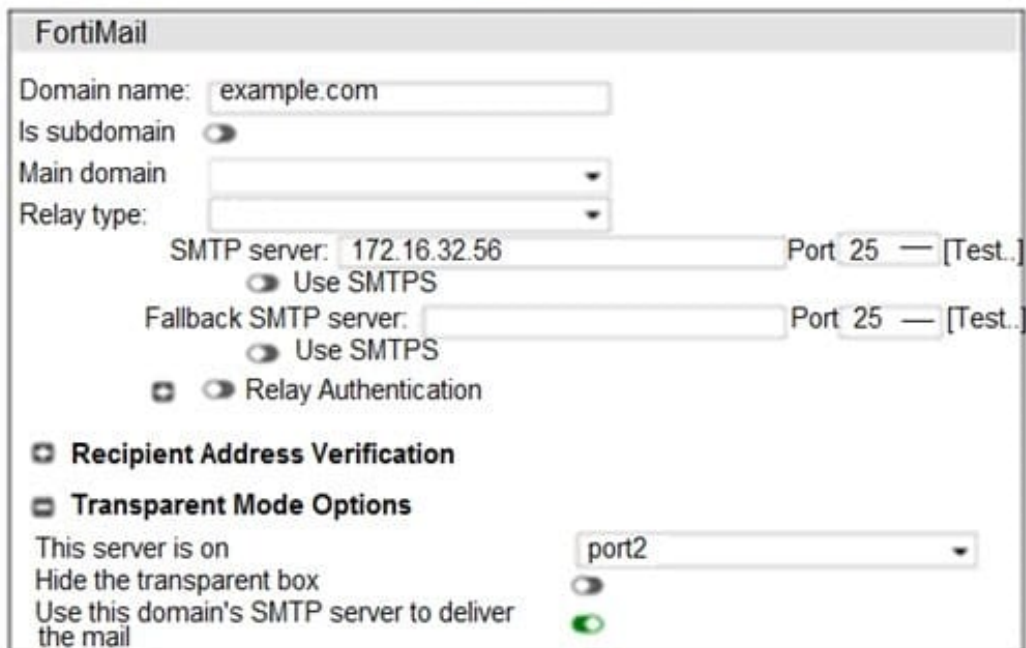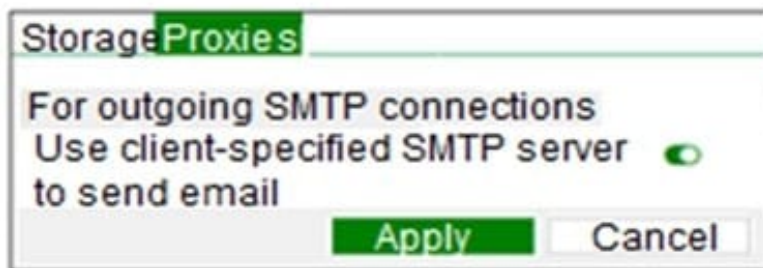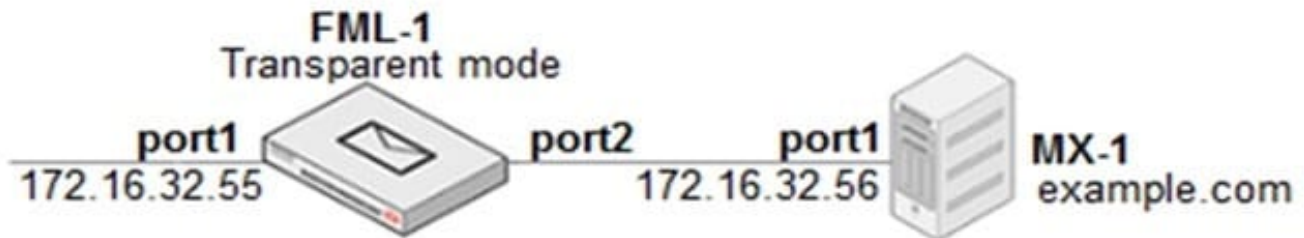

Which two statements about how the transparent mode FortiMail device routes email for the example.com domain are true? (Choose two.)

- A. If incoming email messages are undeliverable, FML-1 can queue them to retry later
- B. If outgoing email messages are undeliverable, FM-1 can queue them to retry later
- C. FML-1 will use the built-in MTA for outgoing sessions



D. FML-1 will use the transparent proxy for incoming sessions

Correct Answer: BD

QUESTION 2

An organization has different groups of users with different needs in email functionality, such as address book access, mobile device access, email retention periods, and disk quotas.


Which FortiMail feature specific to server mode can be used to accomplish this?

- A. Resource profiles
- B. Domain-level service settings
- C. Access profiles
- D. Address book management options

Correct Answer: C

QUESTION 3

Refer to the exhibit.

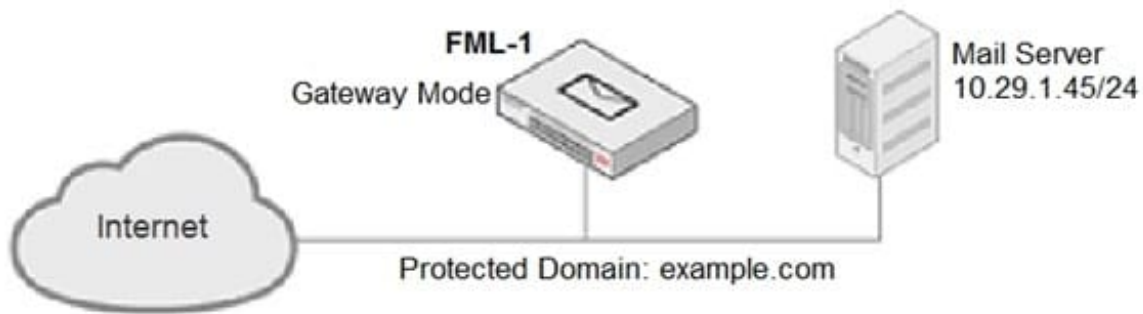

Access Control Rule	
Enabled	<input checked="" type="checkbox"/>
Sender:	User Defined *
Recipient:	User Defined *
Source:	IP/Netmask 0.0.0.0/0
Reverse DNS pattern:	* <input type="checkbox"/> Regular Expression
Authentication status:	Any
TLS profile:	--None--
Action:	Reject
Comments:	

+ New... Edit...

It is recommended that you configure which three access receive settings to allow outbound email from the example.com domain on FML-1? (Choose three.)

- A. The Sender pattern should be set to *@example.com
- B. The Action should be set to Relay
- C. The Recipient pattern should be set to 10.29.1.45/24
- D. The Enable check box should be cleared
- E. The Sender IP/netmask should be set to 10.29.1.45/32



Correct Answer: BDE

QUESTION 4

A FortiMail is configured with the protected domain example.com.

On this FortiMail, which two envelope addresses are considered incoming? (Choose two.)

- A. MAIL FROM: accounts@example.com RCPT TO: sales@external.org
- B. MAIL FROM: support@example.com RCPT TO: marketing@example.com
- C. MAIL FROM: training@external.org RCPT TO: students@external.org
- D. MAIL FROM: mis@hosted.net RCPT TO: noc@example.com

Correct Answer: CD

Reference: https://fortinetweb.s3.amazonaws.com/docs.fortinet.com/v2/attachments/9aa62d26-858d11ea-9384-00505692583a/FortiMail-6.4.0-Administration_Guide.pdf (30)

QUESTION 5

Which firmware upgrade method for an active-passive HA cluster ensures service outage is minimal, and there are no unnecessary failovers?

- A. Break the cluster, upgrade the units independently, and then form the cluster
- B. Upgrade both units at the same time
- C. Upgrade the standby unit, and then upgrade the active unit
- D. Upgrade the active unit, which will upgrade the standby unit automatically

Correct Answer: B

Reference: <https://docs.fortinet.com/document/fortimail/6.2.0/administration-guide/725928/upgradingfirmware-on-ha-units>

[NSE6_FML-6.2 Practice Test](#)

[NSE6_FML-6.2 Exam Questions](#)

[NSE6_FML-6.2 Braindumps](#)