



NSE7_SDW-7.0^{Q&As}

Fortinet NSE 7 - SD-WAN 7.0

Pass Fortinet NSE7_SDW-7.0 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.passapply.com/nse7_sdwan-7-0.html

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Fortinet
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers





QUESTION 1

Which diagnostic command you can use to show interface-specific SLA logs for the last 10 minutes?

- A. diagnose sys virtual-wan-link health-check
- B. diagnose sys virtual-wan-link log
- C. diagnose sys virtual-wan-link sla-log
- D. diagnose sys virtual-wan-link intf-sla-log


Correct Answer: C

Reference: <https://docs.fortinet.com/document/fortigate/6.2.0/cookbook/943037/sla-logging>
<https://community.fortinet.com/t5/FortiGate/Technical-Tip-SLA-Logging/ta-p/190934>

QUESTION 2

Refer to the exhibit.

Multiple IPsec VPNs are formed between two hub-and-spokes groups, and site-to-site between Hub 1 and Hub 2. The administrator configured ADVPN on the dual regions topology

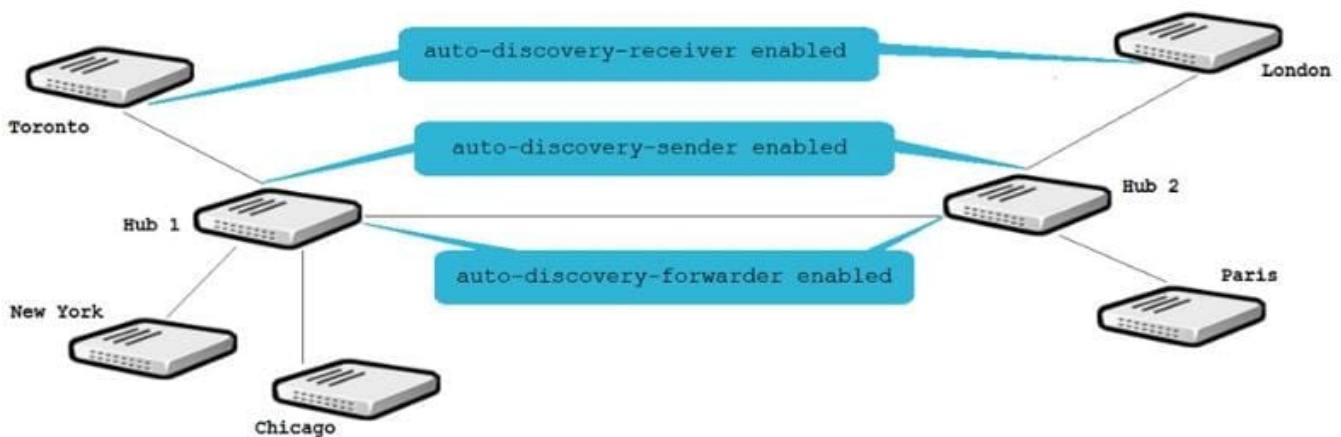

Which two statements are correct if a user in Toronto sends traffic to London? (Choose two)


- A. Toronto needs to establish a site-to-site tunnel with Hub 2 to bypass Hub 1.
- B. The first packets from Toronto to London are routed through Hub 1 then to Hub 2.
- C. London generates an IKE information message that contains the Toronto public IP address.
- D. Traffic from Toronto to London triggers the dynamic negotiation of a direct site-to-site VPN.

Correct Answer: BD

SD-WAN_6.4_Study_Guide page 207

**QUESTION 3**

Refer to the exhibit.

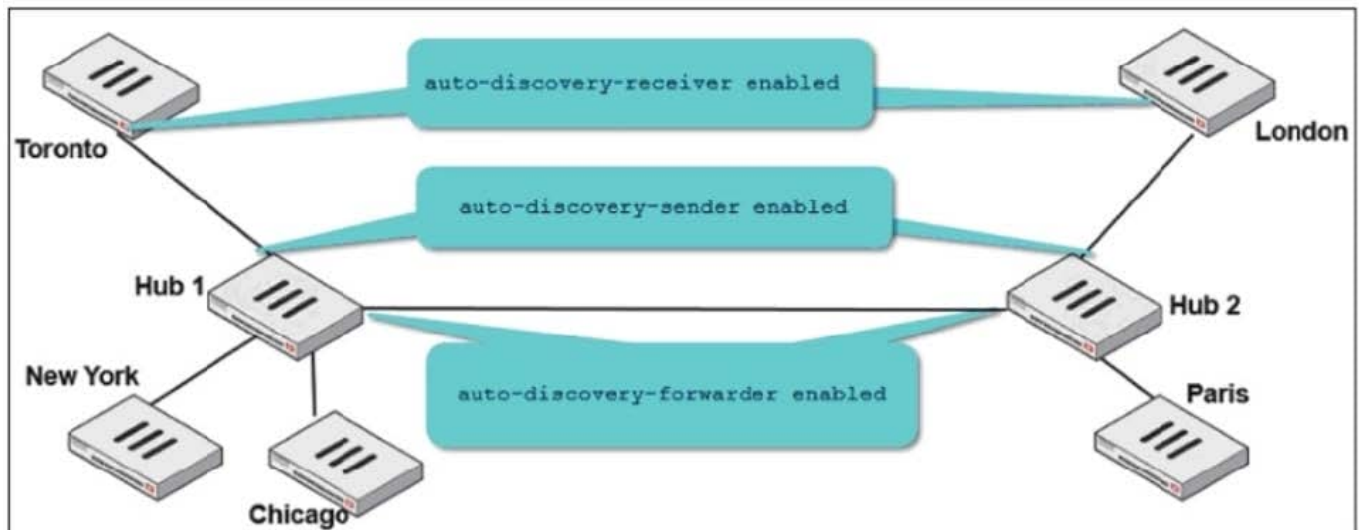

Two hub-and-spoke groups are connected through a site-to-site IPsec VPN between Hub 1 and Hub 2. The administrator configured ADVPN on both hub-and-spoke groups.

Which two outcomes are expected if a user in Toronto sends traffic to London? (Choose two.)

- A. London generates an IKE information message that contains the Toronto public IP address.
- B. Traffic from Toronto to London triggers the dynamic negotiation of a direct site-to-site VPN.
- C. Toronto needs to establish a site-to-site tunnel with Hub 2 to bypass Hub 1.
- D. The first packets from Toronto to London are routed through Hub 1 then to Hub 2.

Correct Answer: BD

QUESTION 4

Refer to the exhibit.



```
config vpn ipsec phase1-interface
  edit "FIRST_VPN"
    set type dynamic
    set interface "port1"
    set peertype any
    set proposal aes128-sha256 aes256-sha38
    set dhgrp 14 15 19
    set xauthtype auto
    set authusrgrp "first-group"
    set psksecret fortinet1
  next
  edit "SECOND_VPN"
    set type dynamic
    set interface "port1"
    set peertype any
    set proposal aes128-sha256 aes256-sha38
    set dhgrp 14 15 19
    set xauthtype auto
    set authusrgrp "second-group"
    set psksecret fortinet2
  next
edit
```

FortiGate has multiple dial-up VPN interfaces incoming on port1 that match only FIRST_VPN.

Which two configuration changes must be made to both IPsec VPN interfaces to allow incoming connections to match all possible IPsec dial-up interfaces? (Choose two.)

- A. Specify a unique peer ID for each dial-up VPN interface.
- B. Use different proposals are used between the interfaces.
- C. Configure the IKE mode to be aggressive mode.
- D. Use unique Diffie Hellman groups on each VPN interface.

Correct Answer: AC

SD-WAN 6.4.5 Study Guide. pg 182



QUESTION 5

Which diagnostic command can you use to show the SD-WAN rules interface information and state?

- A. diagnose sys sdwan route-tag-list.
- B. diagnose sys sdwan service.
- C. diagnose sys sdwan member.
- D. diagnose sys sdwan neighbor.

Correct Answer: B

<https://community.fortinet.com/t5/FortiGate/Technical-Tip-Diagnostic-commands-to-check-the-status-of-the-SD/tap/194246>

[NSE7_SDW-7.0 PDF Dumps](#)

[NSE7_SDW-7.0 Study Guide](#)

[NSE7_SDW-7.0 Exam Questions](#)