



QSDA2019^{Q&As}

Qlik Sense Data Architect Certification Exam - June 2019 Release

Pass Qlik QSDA2019 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/qsgda2019.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Qlik Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

A table is generated resulting from the following script

```
LOAD *,
Date(OrderTime) as Date;
LOAD * INLINE [
Order, OrderTime
'ABC',2017-03-12 10:20:15
'XYZ',2017-03-12 11:21:15
'DEF',2017-03-12 10:21:35];
```

When the data architect selects a date, some, but NOT all, orders for that date are shown How should the data architect modify the script to show all orders for the selected date? A)

```
LOAD *,
Date#(OrderTime, 'YYYY-MM-DD') as Date;
LOAD * INLINE [
Order, OrderTime
'ABC',2017-03-12 10:20:15
'XYZ',2017-03-12 11:21:15
'DEF',2017-03-12 10:21:35];
```

B)

```
LOAD *,
Floor(MakeDate(OrderTime, 'YYYY-MM-DD')) as Date;
LOAD * INLINE [
Order, OrderTime
'ABC',2017-03-12 10:20:15
'XYZ',2017-03-12 11:21:15
'DEF',2017-03-12 10:21:35];
```

C)

```
LOAD *,
Date(Floor(OrderTime), 'YYYY-MM-DD') as Date;
LOAD * INLINE [
Order, OrderTime
'ABC',2017-03-12 10:20:15
'XYZ',2017-03-12 11:21:15
'DEF',2017-03-12 10:21:35];
```

D)



```
LOAD *,
Date(OrderTime, 'YYYY-MM-DD') as Date;
LOAD * INLINE [
Order, OrderTime
'ABC', 2017-03-12 10:20:15
'XYZ', 2017-03-12 11:21:15
'DEF', 2017-03-12 10:21:35];
```

A. Option A

B. Option B


C. Option C

D. Option D

Correct Answer: C

QUESTION 2

Refer to the exhibit.

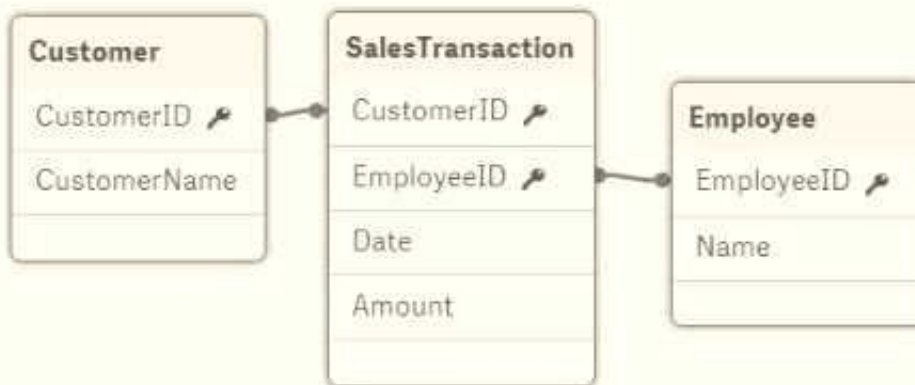

CustomerID	CustomerName	Country
A1537438	Durgan Ltd	United Kingdom
A3055345	Kertzmann and Sons	United States of America
I1803273	Weissnat, Morar and Mills	USA
Z5373110	Towne, Von and Gulgowski	UK
KK720402	Shanahan	U.S.A
AA82402	Globex	Japan
BB29729	Grant	France
B11764	Bernhard, Hettinger and Kautzer	New Zealand

EmployeeID	Name
AMER001	Alice
AMER99837	Bob
EMEA1207	Carlos
APAC3322	Grace
APAC92611	John
EMEA1304	Heidi

A global sales organization operates in three regions: AMERICAS, EMEA: and APAC. Each region stores its sales transactions in a separate database in which the employees update customer data through a third-party app. The data is extracted into three QVDs.

A data architect sets up a two-tier architecture for the data load. The data architect needs to add the region to the data model.

Which technique should the data architect use to create the Region field?

- A. Create a Region field in the SalesTransaction table and populate using fixed region values while loading from each source
- B. Create a Region field in the Employee table and populate using the LTrim function on the EmployeeID
- C. Create a Region field in the Employee table and populate using the SubField function on the EmployeeID
- D. Create a Region field in the SalesTransaction table and create a mapping table based on the Country field in the



Customer table

Correct Answer: D

QUESTION 3

A data architect builds a data model for a large user group. Some sheets will be published, and the app will allow users to create their own visualizations and analyze data. Some fields must NOT appear in any field list.

How should a data architect meet these requirements?

- A. Use HidePrefix variable
- B. Add fields to master items
- C. Use security rules
- D. Use HideField variable

Correct Answer: A

QUESTION 4

Refer to the exhibit.

Price Groups		
Start	Stop	Price Group
0.00	9.99	0-10
10.00	19.99	10-20
20.00	29.99	20-30
30.00	39.99	30-40
40.00	49.99	40-50
50.00	59.99	50-60

A clothing retailer wants to review their product pricing strategy. A data architect must classify each product into a price group. The price groups must be the same width by default and allow users to dynamically change the width of the bucket during analysis.

Which feature should the data architect use to meet these requirements?

- A. IntervalMatch and use variables
- B. Nested IFs in a calculated dimension
- C. Class function in a calculated dimension



D. Class function in the script and use variables

Correct Answer: C

QUESTION 5

Multiple department fields in a dataset require a description. A data architect needs to add the department descriptions or a default value when the department does NOT have a description.

Which strategy should the data architect use to meet these requirements?

- A. ApplyMap with two parameters after the Mapping load
- B. Left Join between tables and Description.xlsx in every Department table
- C. Enter "Missing description" in the blank rows for Description.xlsx, then use Mapping Load
- D. ApplyMap with three parameters after the Mapping load

Correct Answer: A

[Latest QSDA2019 Dumps](#)

[QSDA2019 Practice Test](#)

[QSDA2019 Study Guide](#)