



VCE & PDF

PassApply.com

<https://www.passapply.com/mcd-level1-delta.html>

2024 Latest passapply MCD-LEVEL1-DELTA PDF and VCE dumps Download

MCD-LEVEL1-DELTA^{Q&As}

MuleSoft Certified Developer - Level 1 (Mule 4) DELTA

Pass Mulesoft MCD-LEVEL1-DELTA Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/mcd-level1-delta.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Mulesoft
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

What DataWeave 2.0 type can be used as input to a mapObject operation?

- A. Array
- B. Object
- C. String
- D. Map

Correct Answer: B

QUESTION 2

What is not an asset?

- A. Exchange
- B. Template
- C. Example D. Connector

Correct Answer: A

QUESTION 3

What is the face of CloudHub and integrates with Platform Services?

- A. None of these
- B. Runtime Manager Console
- C. Integration Apps
- D. CloudHub Workers

Correct Answer: B


QUESTION 4

Refer to the exhibits.

A web client sends sale data in a POST request to the Mule application. The Transform Message component then enrich the payload by prepending a vendor name to the sale data. What is written to the sales.csv file when the flow executes?



```
<?xml version="1.0" encoding="UTF-8"?>
<sale>
  <transaction_id>55-4848-44KK-45YQ</transaction_id>
  <customer_id>anniepoint@acme.com</customer_id>
  <customer>Annie Point</customer>
  <item>Car Seat</item>
  <qty>1</qty>
  <price>59</price>
</sale>
```

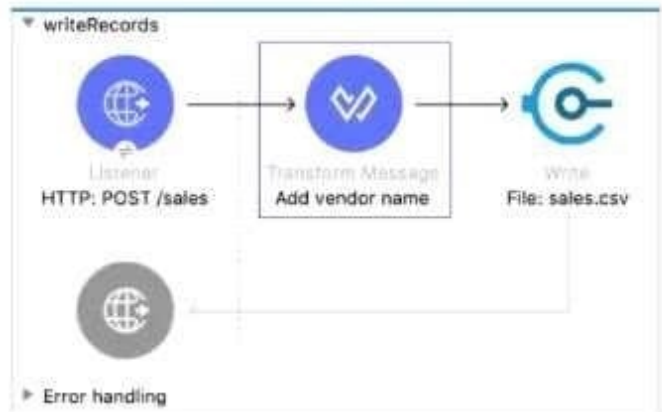

```
<flow name="writeRecords" >
  <http:listener doc:name="HTTP: POST /sales" config-ref="HTTP_listener_config"
    path="/sales" allowedMethods="POST"/>
  <ee:transform doc:name="Add vendor name" >
    <ee:message >
      <ee:set-payload ><![CDATA[%dw 2.0
        output application/json
        ---
        {vendor: "Acme"} ++ payload.sale]]>
      </ee:set-payload>
    </ee:message>
  </ee:transform>
  <file:write doc:name="File: sales.csv" path="file-store/sales.csv">
  </file:write>
</flow>
```

- A. The enriched payload in JSON format
- B. The enriched payload in XML format
- C. The enriched payload in CSV format
- D. An error message

Correct Answer: A

QUESTION 5

A company has an API to manage departments, with each department identified by a unique deptId.

The API was built with RAML according to MuleSoft best practices. What is valid RAML to specify a method to update the details for a specific department?



- A.
 /departments:
 /deptId:
 patch:
- B.
 /departments:
 patch:
 /deptId:
- C.
 /departments:
 patch:
 queryParameters:
 deptId:
- D.
 /departments:
 /{deptId}:
 patch:

A. Option A

B. Option B

C. Option C

D. Option D

Correct Answer: D

QUESTION 6

Refer to the exhibit.



The screenshot shows a web application interface with three main sections:

- order.xml:** An XML document with two items. The first item has an order ID of 592, shipping method 'international', item name 'T-shirt Navy', size 'L', quantity 1, and price 20. The second item has an order ID of 972, shipping method 'domestic', item name 'Cargo Shorts', size 'XL', quantity 2, and price 30.
- Output Payload:** A text area showing the output of a database query. It contains three lines: '1 Row 2.0', '2 output application/json', and '3 ---'.
- JSON Output:** A JSON array with two objects. The first object has index 0, order ID '592', item name 'T-shirt Navy', and line item price 20. The second object has index 1, order ID '972', item name 'Cargo Shorts', and line item price 60.

What Database expression transforms the input to the output?

- A. `payload.order.*item map ((value,index) -> {
 index: index,
 orderId: value.orderId,
 itemName: value.item,
 lineItemPrice: (value.price as :number) * (value.quantity as :number)
})`
- B. `payload.order.*item map ((value,index) -> {
 index: index,
 orderId: value.@orderId,
 itemName: value.item,
 lineItemPrice: (value.price as Number) * (value.quantity as Number)
})`
- C. `payload.order.*item map ((value,index) -> {
 index: index,
 orderId: value.@orderId,
 itemName: value.item,
 lineItemPrice: (value.price as :number) * (value.quantity as :number)
})`
- D. `payload.order.*item map((value,index) -> {
 index: index,
 orderId: value.orderId,
 itemName: value.item,
 lineItemPrice: (value.price as Number) * (value.quantity as Number)
})`

A. Option A



- B. Option B
- C. Option C
- D. Option D

Correct Answer: B

QUESTION 7

In the Database On Table Row operation, what does the Watermark column enable the On Table Row operation to do?

- A. To save the most recent records retrieved from a database to enable database caching.
- B. To enable duplicate processing of records in a database.
- C. To avoid duplicate processing of records in a database.
- D. To delete the most recent records retrieved from a database to enable database caching.

Correct Answer: C

QUESTION 8

Which one of them is NOT a flow in Mule?

- A. sync flow
- B. subflow
- C. async flow
- D. async sub flow

Correct Answer: D

QUESTION 9

What HTTP method in a RESTful web service is typically used to completely replace an existing resource?

- A. GET
- B. PATCH
- C. POST
- D. PUT

Correct Answer: D



QUESTION 10

Refer to the exhibit.



```
<flow name="main">
  <http:listener doc:name="HTTP: GET /" config-ref="HTTP_Listener_config" path="/" />
  <http:request method="POST" doc:name="HTTP: POST /data" url="http://localhost:8081/data"/>
  <jms:publish-consume doc:name="JMS: num1" config-ref="JMS_Config" destination="num1"/>
  <jms:publish doc:name="JMS: num2" config-ref="JMS_Config" destination="num2"/>
  <set-payload value="#[payload + 1]" doc:name="payload + 1" />
</flow>
```

What payload is returned from a request to http://localhost.8081/

Refer to the exhibits, what payload is returned from a request to http://localhost;8081/?

- A. 1
- B. 2
- C. 3
- D. 4

Correct Answer: C



QUESTION 11

In an application network. If the implementation but not the interface of a product API changes, what needs to be done to the other APIs that consume the product API?

- A. The applications associated with the other APIs must be restarted
- B. The applications associated with the other APIs must be recoded
- C. The other APIs must be updated to consume the updated product API
- D. Nothing needs to be changed in the other APIs or their associated applications

Correct Answer: D

QUESTION 12

What path setting is required for an HTTP Listener endpoint to route all requests to an APIkit router?

- A. /(*)
- B. /
- C. /()
- D. /*

Correct Answer: D

QUESTION 13

An SLA based policy has been enabled in API Manager. What is the next step to configure the API proxy to enforce the new SLA policy?

- A. Add new property placeholders and redeploy the API proxy
- B. Add new environment variables and restart the API proxy
- C. Restart the API proxy to clear the API policy cache
- D. Add required headers to the RAML specification and redeploy the new API proxy

Correct Answer: D

QUESTION 14

<http://dev.acme.com/api/patients?year=2016>

What should this endpoint return?



- A. Patient with id 2016
- B. All patients
- C. No patients
- D. Patients from year 2016

Correct Answer: D

QUESTION 15

What is the trait name you would use for specifying client credentials in RAML?

- A. headers
- B. client-id
- C. client-id-required
- D. we do not specify in RAML

Correct Answer: C

[Latest MCD-LEVEL1-DELTA Dumps](#)

[MCD-LEVEL1-DELTA PDF Dumps](#)

[MCD-LEVEL1-DELTA Exam Questions](#)