



4A0-104^{Q&As}

Alcatel-Lucent Services Architecture

Pass Alcatel-Lucent 4A0-104 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.passapply.com/4a0-104.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Alcatel-Lucent Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1


Which of the following about the Nokia 7750 SR's sdp-ping utility is FALSE?

- A. It tests uni-directional or round-trip in-band connectivity.
- B. It tests the reachability of hosts that are using an SDP.
- C. It tests the reachability of the far-end IP address of an SDP through its tunnel.
- D. It can be used by specifying only an SDP ID.

Correct Answer: B

QUESTION 2

Click the exhibit.

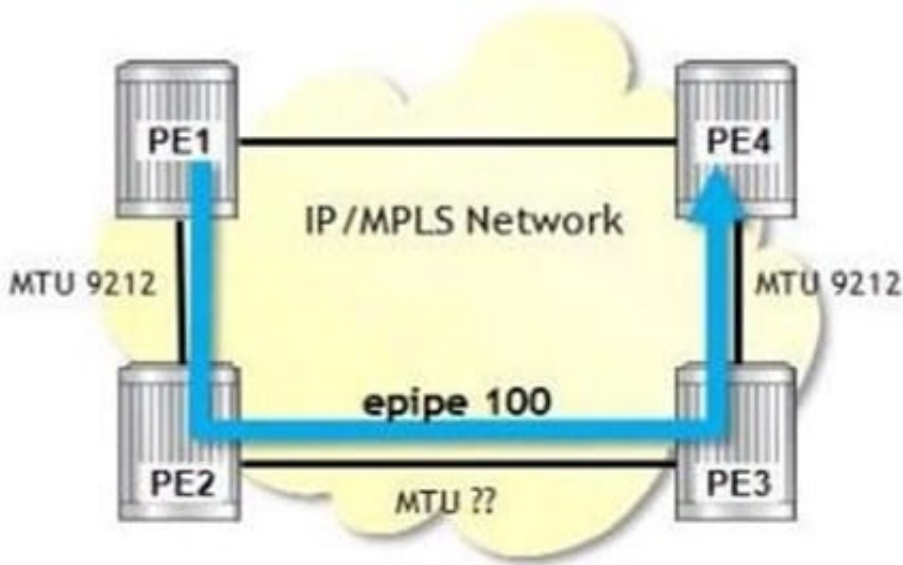

```

PE1# oam sdp-mtu 4 size-inc 1550 1570 step 1
Size      Sent      Response
-----
1550      .          Success
1551      .          Success
1552      .          Success
1553      .          Success
1554      .          Success
1555      .          Success
1556      .          Success
1557      ...       Request Timeout

Maximum Response Size: 1556
  
```

E-pipe 100 is using an SDP with an LSP that uses the path shown (PE1-PE2-PE3-PE4). Based on the OAM command output, which of the following is FALSE?

- A. The E-pipe can support a maximum MTU size of 1578.
- B. The ports of the link PE2-PE3 have an MTU of 1578.
- C. An svc-ping of the E-pipe will succeed.
- D. If the step size was 2, the maximum response size would be the same.

Correct Answer: A

QUESTION 3

Consider an E-pipe service configured with SAP 1/1/1:5 and SAP 1/1/1:6.7. If the SAP 1/1/1:5 accepts an ingress frame, which of the following is TRUE?



- A. The frame egresses 1/1/1:6.7 with an outer VLAN tag of 6 and inner tag of 7.
- B. The frame is dropped at the egress SAP 1/1/1:6.7.
- C. The frame egresses 1/1/1:6.7 with VLAN tag 5.
- D. The frame egresses 1/1/1:6.7 with VLAN tag 6.

Correct Answer: A

QUESTION 4

A Cpipe supports both structured and unstructured frames.

- A. TRUE
- B. FALSE

Correct Answer: A

QUESTION 5

Which of the following about the BGP VPN-IPv4 address family is FALSE?

- A. When a PE router receives an IPv4 prefix from its local CE, it creates a VPN-IPv4 prefix.
- B. VPN-IPv4 allows BGP to distinguish between duplicate prefixes originating from different customers.
- C. In a VPRN, data traffic is carried in packets that have VPN-IPv4 addresses.
- D. VPN-IPv4 addresses are only present within the service provider network.

Correct Answer: C

[4A0-104 VCE Dumps](#)

[4A0-104 Practice Test](#)

[4A0-104 Study Guide](#)